


Integrale Chilled Display Well

CHARACTERISTICS

- Flat bed chilled display well for the display of salads, drinks and fruit.
- Gentle flow of convected air maintains pre-chilled food at a safe regulated temperature.
- The angle of the display deck can be adjusted for enhanced presentation.
- Gantry mounted controller on operators side (GO) as standard.
- The gantry controller can be installed on customer side (GC) on request.
- Excellent value for money.

OPTIONAL EXTRAS

- Glass edge protection (per edge).
- Full height front glass and ends for assisted service.
- Supply lead (length).
- Export packing case (recommended).
- Non standard airflow kit for condensing unit.

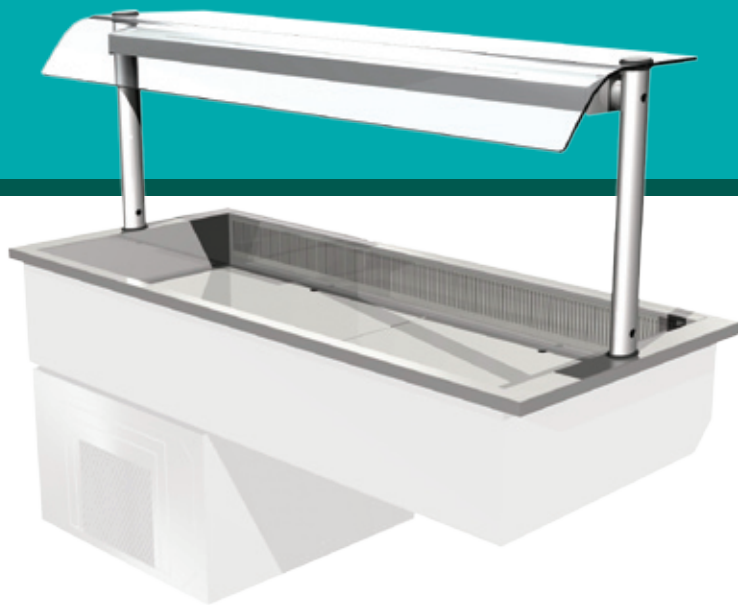


VISUAL SHOWS THE ICW4-GO DISPLAY

SPECIFICATIONS

Stock Code	Capacity gn	Overall size mm	Weight kg	Wattage kw	List Price £
ICW2-GO	2/1	825 x 660 x 535h	91	1.7	£2844
ICW3-GO	3/1	1175 x 660 x 535h	108	2.0	£3173
ICW4-GO	4/1	1525 x 660 x 535h	128	2.2	£3282
ICW5-GO	5/1	1875 x 660 x 535h	141	2.2	£3611
ICW6-GO	6/1	2330 x 660 x 535h	158	2.5	£4531

COUNTER CUT-OUT SIZES

Stock Code	Minimum cut-out size mm
ICW2-GO	780 x 650
ICW3-GO	1130 x 650
ICW4-GO	1480 x 650
ICW5-GO	1830 x 650
ICW6-GO	2180 x 650

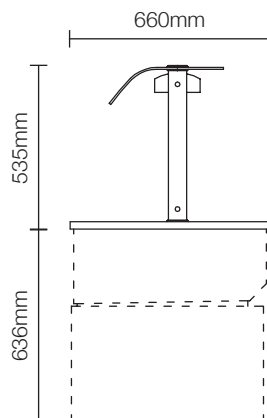

For more information on this product, please contact a member of our sales team or visit our website.

Tel: +44 (0)151 548 2211 Fax: +44 (0)151 549 2179
 Email: enquiries@counterline.co.uk Website: www.counterline.co.uk