JustCatering.Com

Distributed By JustCatering.Com Ltd

10 Jessop Avenue, Norwood Green, Middlesex, UB2 5UY, UK Tel/Fax: +44 (0)2088431712 Mobile: 07929291670 E-mail: sales@justcateri











Catering Refrigeration

Stylish yet Spacious

Built for Catering









Catering Refrigeration

Lec Refrigeration – providing quality refrigeration products for 70 years!



New improved range

The new range of fridges and freezers from Lec Commercial offer a complete and comprehensive choice of quality refrigeration and freezing solutions for busy caterers. We know that providing the best possible storage environment for your food is vital and we work closely with catering professionals to ensure our products fully meet your needs.



Save money on energy bills with Platinum

Our new Platinum range of catering fridges and freezers is packed with a host of user-friendly features and most models use our most energy efficient R600a refrigerant. This ensures their on-going running costs are kept as low as possible, keeping your electricity bills down.



Need lots of storage capacity? No problem!

We also have a range of large-capacity fridges and freezers ideal for when you need a lot of chilled or frozen storage space. These models are also packed with a host of features that enable you to get the most out of your refrigerated storage.



Buy with total confidence

We know you just want to think about your customers, not worry about your fridge or freezer. Therefore, all the fridges and freezers in this brochure come with a 2 years parts and labour warranty for complete peace of mind.



Buy with Confidence

We offer one of the best after-sales warranties within the catering sector! When you buy a Lec Commercial or Burco product, you can be sure you are also receiving our award-winning after-sales service and support. Our UK-based call centre is on hand 7 days a week, 363 days a year to answer any questions you may have. We also have a fleet of over 180 service engineers UK-wide, ensuring that in the unlikely event you encounter an issue with one of our appliances, one of our trained engineers can be with you quickly to help sort the problem out.

The Lec Commercial Warranty

All refrigeration products come complete with a free 2 years parts and labour warranty giving you complete peace of mind in your new Lec Commercial appliance. If you do encounter any problems with your Lec Commercial unit, simply call our helpline and our support team are on hand to assist you 7 days a week on **0844 815 3737.**

Extend your warranty for added peace of mind*

Glen Dimplex Professional Appliances has now launched a comprehensive extended warranty package enabling you to protect your product beyond our free of charge parts and labour warranty.



Call us today to find out more!

0844 815 3742

This package includes new for old replacement and offers reassurance in the current uncertain economic climate.



Contents

| Platinum Range at a Glance | 04 |
|----------------------------|----|
| Platinum 200L Range | 06 |
| Platinum 400L Range | 10 |
| Platinum 600L Range | 14 |
| Gastronorm Range | 20 |
| Chest Freezer Range | 22 |











200L




PLATINUM


RANGE

With many years experience in refrigeration, you can trust Lec to provide a range of products perfectly suited to your needs.

Launched to celebrate our 70th year, we have developed our Platinum range. Now you can choose a fridge or freezer that has a great storage capacity with a whole host of user-friendly features! Better still, you can save money by keeping running costs low, as most of our range uses energy efficient R600a refrigerant for the most effective cooling system.

Suitable for:

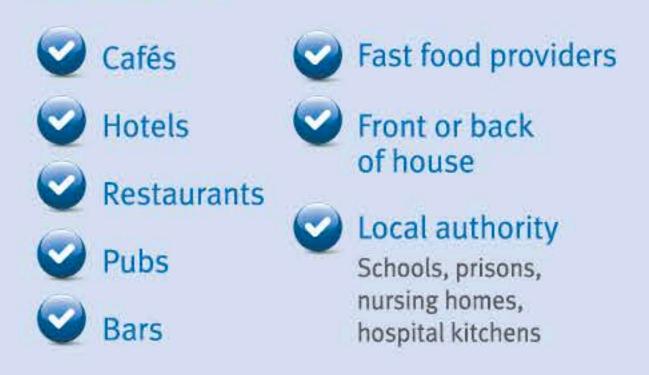

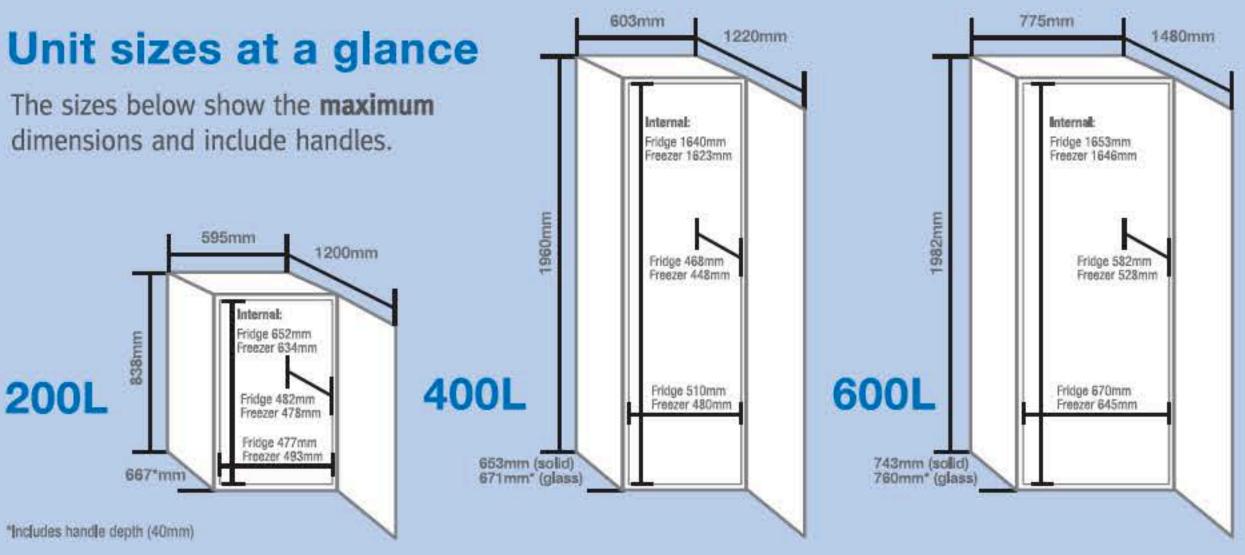

Range overview at a glance...



Large internal storage capacity

Allows you to store more than with most equivalent sized competitor models

Works in the warmest of kitchens Our range works effectively even in kitchens up to 38°C

Energy efficient refrigerant

Most models use R600a refrigerant for the lowest running costs. Look out for the symbol



New advanced controller

With temperature display, high/low temperature alarms and a new door open system that sounds an audible alarm, should the door be left open accidentally



Fitted secure lock

Enables you to keep contents safe back or front of house



Removable/replaceable door seal

Easy to remove for thorough cleaning and simple to replace when it becomes worn through repeated door openings, avoiding costly door replacement



Fitted castors as standard

Our 400L and 600L ranges come complete with fitted lockable castors for ease of movement. Our 200L range has fitted rollers and adjustable feet





















Choose a model that suits you

The range is available in a choice of white or stainless steel finishes, and all refrigerators have a choice of solid or glass door options

| | 200L Fridges | 200L Freezers | 400L Fridges | 400L Freezers | 600L Fridges | 600L Freezers |
|---------------------------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|
| Energy efficient R600a refrigerant | 1 | 1 | 1 | | 1 | |
| Glass door option available | 1 | | 1 | | 1 | |
| Stylish integrated handle | | | 1 | 1 | 1 | 1 |
| Fitted lockable castors | | | 1 | 1 | 1 | V |
| Internal light | 1 | | 1 | | 1 | |
| Auto defrost | 1 | | 1 | | 1 | |
| Self closing door* | 1 | | 1 | 1 | 1 | 1 |
| Door open alarm | 1 | 1 | 1 | 1 | 1 | 1 |
| High/low temperature alarm | 1 | 1 | 1 | 1 | 1 | 1 |
| Fitted lock | 1 | 1 | 1 | 1 | 1 | 1 |
| Gastronorm compatible | | | | | 1 | 1 |
| Removable/ replaceable door seal | 1 | 1 | 1 | 1 | 1 | 1 |

*on all models from Spring 2012

PLATINUM

visit www.lec-commercial.co.uk for more information



Under-counter Fridges 200L



OPERATES IN KITCHENS UP TO 38°C

REFRIGERATION CATERING

Space Efficient Range

Our 200L range fits neatly under your existing counter or preparation surface maximising use of available space.



Key range features at a glance

Large 200L capacity maximises available under-counter storage space

0°C to 10°C working temperature range allows you to select your ideal temperature

- 2 removable wire shelves, \checkmark 7 variable shelf positions offers great internal storage flexibility
 - Easy grab handles for ease of opening

 \checkmark

 $\langle \checkmark \rangle$

Fitted rollers easy to manoeuvre the unit for cleaning

Solid or glass door perfect for front or back of house

> Lockable to keep contents secure when needed

Self-closing door* (solid door models only) user-friendly and means the door won't be left open accidentally

Auto defrost for low on-going maintenance

Internal LED light switches on automatically when door opens*

Warning alarms High/low temperature and door open alarms to alert users to a problem

* on all models from Spring 2012

Conditions apply. See website for details.











White Solid Door

White Glass Door



Stainless Steel Solid Door



| PLATINUM 200L Refrigerators | | | | | | | |
|-----------------------------|-----------|--------------------------|----------------|--------|--|--|--|
| Model | SKU Code | Dimensions hxwxd (mm) | Weight (kg) | Colour | | | |
| CRS200W | 444441134 | 838x595x667* | 40 | W | | | |
| CRS200ST | 444441136 | 838x595x667* | 40 | SS | | | |

*includes handle depth (40mm)



Stainless Steel Glass Door



| PCFTTINUM 200L Refrigerators | | | | | | |
|------------------------------|-----------|--------------------------|----------------|--------|--|--|
| Model | SKU Code | Dimensions hxwxd (mm) | Weight (kg) | Colour | | |
| CRG200W | 444441135 | 838x595x667* | 40 | W | | |
| CRG200ST | 444441137 | 838x595x667* | 40 | SS | | |

EN ETTENEN NED 2001 Defrigeratore

*includes handle depth (40mm)







Under-counter Freezers 200L



OPERATES IN KITCHENS UP TO 38°C

Our 200L range fits neatly under your existing counter or preparation surface maximising use of available space.

Space Efficient Range



Key range features at a glance



Large 200L capacity maximises available under-counter storage space



-18° to -25°C working temperature range allows you to select your ideal temperature



3 fixed height shelves for keeping contents separated

Easy grab handles for ease of opening

Fitted rollers easy to manoeuvre the unit for cleaning

Solid door models with a white or stainless steel finish

Lockable to keep contents secure when needed



Self-closing door* means door cannot be left open accidentally, spoiling contents



 \checkmark

Manual defrost for low on-going maintenance

Warning alarms High/low temperature and door open alarms to alert users to a problem

* on all models from Spring 2012











-सा

USES R600a



Stainless Steel Freezer



| 0 | | 1 | | | |
|-----|---|---|---|-----|--|
| | | K | | F | |
| 100 | 2 | | - | aug | |
| - | - | - | - | 1 | |
| | | | | | |


Lec

| PLATINUM 200L Freezers | | | | | | |
|------------------------|-----------|--------------------------|----------------|--------|--|--|
| Model | SKU Code | Dimensions hxwxd (mm) | Weight (kg) | Colour | | |
| CFS200W | 444441138 | 838x595x667* | 40 | W | | |
| CFS200ST | 444441139 | 838x595x667* | 40 | SS | | |

*includes handle depth (40mm)





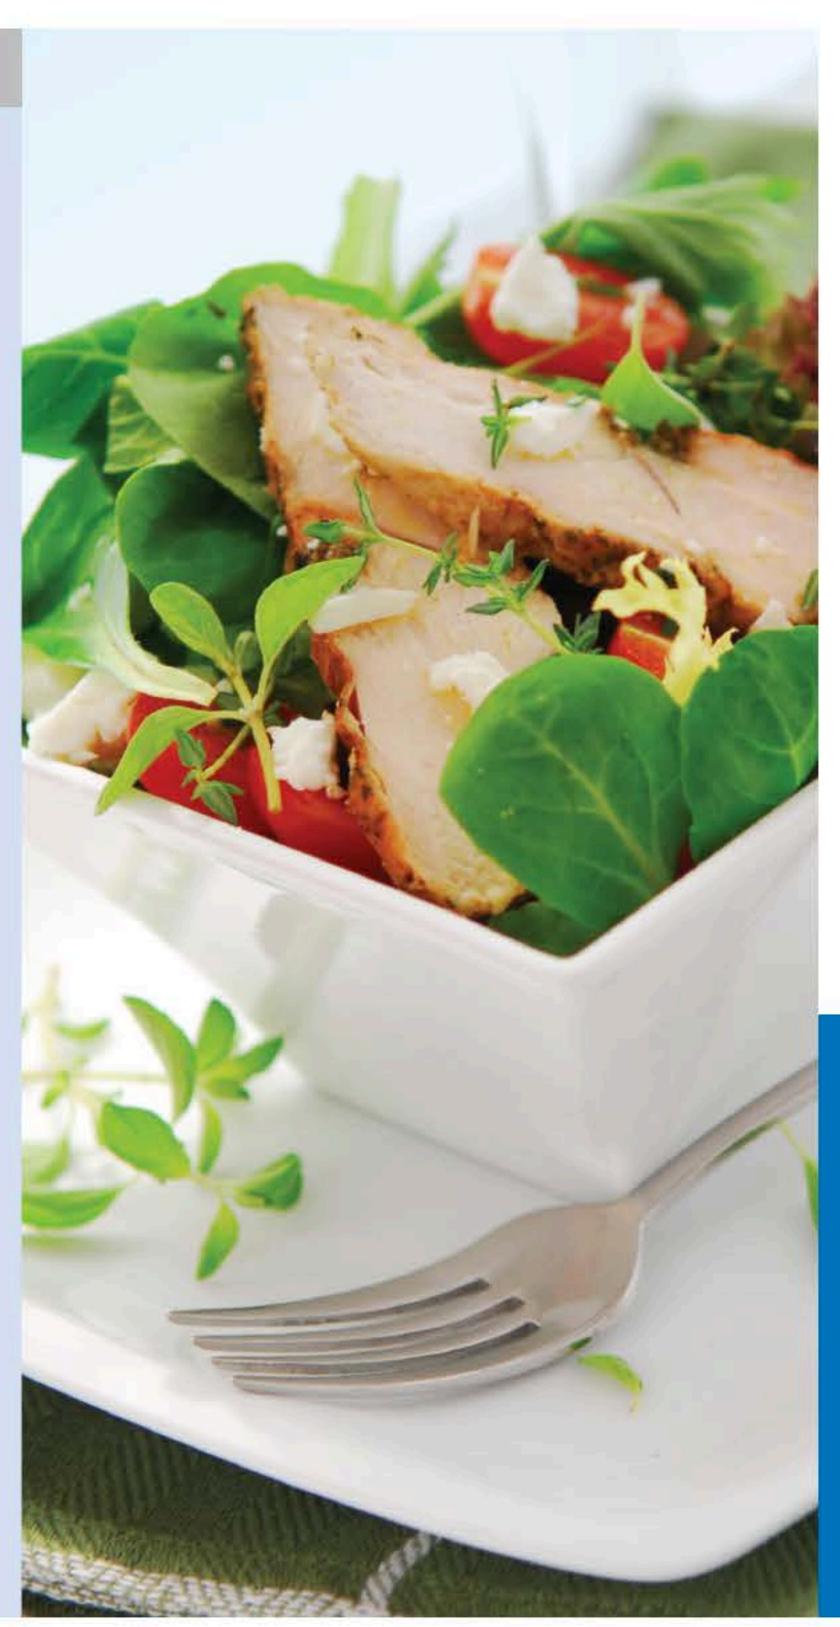

PLATINUM visit www.lec-commercial.co.uk for more information



Freestanding Fridges 400L





OPERATES IN KITCHENS UP TO 38°C



Always use our fixing bracket (supplied) to prevent accidental tipping when door is open.

Large Capacity Range

Key range features at a glance

Solution of the second storage space and storage space 0°C to 10°C working temperature range \checkmark allows you to select your ideal temperature 5 removable wire shelves, 16 variable shelf $\langle \checkmark \rangle$ positions offers great internal storage flexibility Stylish integrated handle \checkmark for ease of opening Solid or glass door \checkmark perfect for front or back of house 4 fitted castors with two locking at front for ease of movement Lockable to keep contents secure when needed Self-closing door (solid door models only) user-friendly and means door cannot be left open accidentally Automatic defrost for low on-going maintenance Warning alarms \checkmark High/low temperature and door open alarms to alert users to a problem Internal LED light \checkmark switches on automatically when door opens **Electronic Controller** Internal LED Light **Fitted Castors**

SOLID DOOR MODELS

PLATINUM 400L Refrigerators

| Model | SKU Code | Dimensions hxwxd (mm) | Weight (kg) | Colour |
|----------|-----------|--------------------------|----------------|--------|
| CRS400W | 444441140 | 1960x603x653 | 80 | W |
| CRS400ST | 444441142 | 1960x603x653 | 80 | SS |



GLASS DOOR MODELS

PLATINUM 400L Refrigerators

| Model | SKU Code | Dimensions hxwxd (mm) | Weight (kg) | Colour |
|----------|-----------|--------------------------|----------------|--------|
| CRG400W | 444441141 | 1960x603x671* | 80 | W |
| CRG400ST | 444441143 | 1960x603x671* | 80 | SS |

*includes handle depth (40mm)



PLATINUM visit www.lec-commercial.co.uk for more information



Freezers 400L





OPERATES IN KITCHENS UP TO 38°C



Always use our fixing bracket (supplied) to prevent accidental tipping when door is open.

Large Capacity Range

Key range features at a glance



SOLID DOOR MODELS

PLATINUM 400L Freezers

| Model | SKU Code | Dimensions hxwxd (mm) | Weight (kg) | Colour |
|----------|-----------|--------------------------|----------------|--------|
| CFS400W | 444441144 | 1960x603x653 | 85 | W |
| CFS400ST | 444441145 | 1960x603x653 | 85 | SS |



Want to buy shelf baskets for our freezers? Please contact us for details! Call us on 0844 815 3755



Fridges 600L



OPERATES IN KITCHENS UP TO 38°C

| | y range features at a glance Large 600L capacity |
|--------------|--|
| \checkmark | offers maximum refrigerated storage space |
| 2 | 0°C to 10°C working temperature range allows you to select your ideal temperature |
| V | 5 removable wire shelves, 20 variable shelf positions offers great internal storage flexibility |
| V | Stylish integrated handle for ease of opening |
| 0 | Solid or glass door perfect for front or back of house |
| 0 | 4 fitted castors with two locking at front for ease of movement |
| 0 | Lockable to keep contents secure when needed |
| V | Self-closing door (solid door models only) user-friendly and means door cannot be left open accidentally |
| 2 | Automatic defrost for low on-going maintenance |
| 0 | Internal LED light switches on automatically when door opens |
| 2 | Warning alarms High/low temperature and door open alarms to alert users to a problem |

SOLID DOOR MODELS

PLATINUM 600L Refrigerators

| Model | SKU Code | Dimensions hxwxd (mm) | Weight (kg) | Colour |
|----------|-----------|--------------------------|----------------|--------|
| CRS600W | 444441146 | 1982x775x743 | 101 | W |
| CRS600ST | 444441147 | 1982x775x743 | 101 | SS |



GLASS DOOR MODELS

PLATINUM 600L Refrigerators

| Model | SKU Code | Dimensions hxwxd (mm) | Weight (kg) | Colour |
|----------|-----------|--------------------------|----------------|--------|
| CRG600W | 444441153 | 1982x775x760* | 101 | W |
| CRG600ST | 444441154 | 1982x775x760* | 101 | SS |


"includes handle depth (40mm)



PLFTMUM visit www.lec-commercial.co.uk for more information



Freestanding Freezers 600L

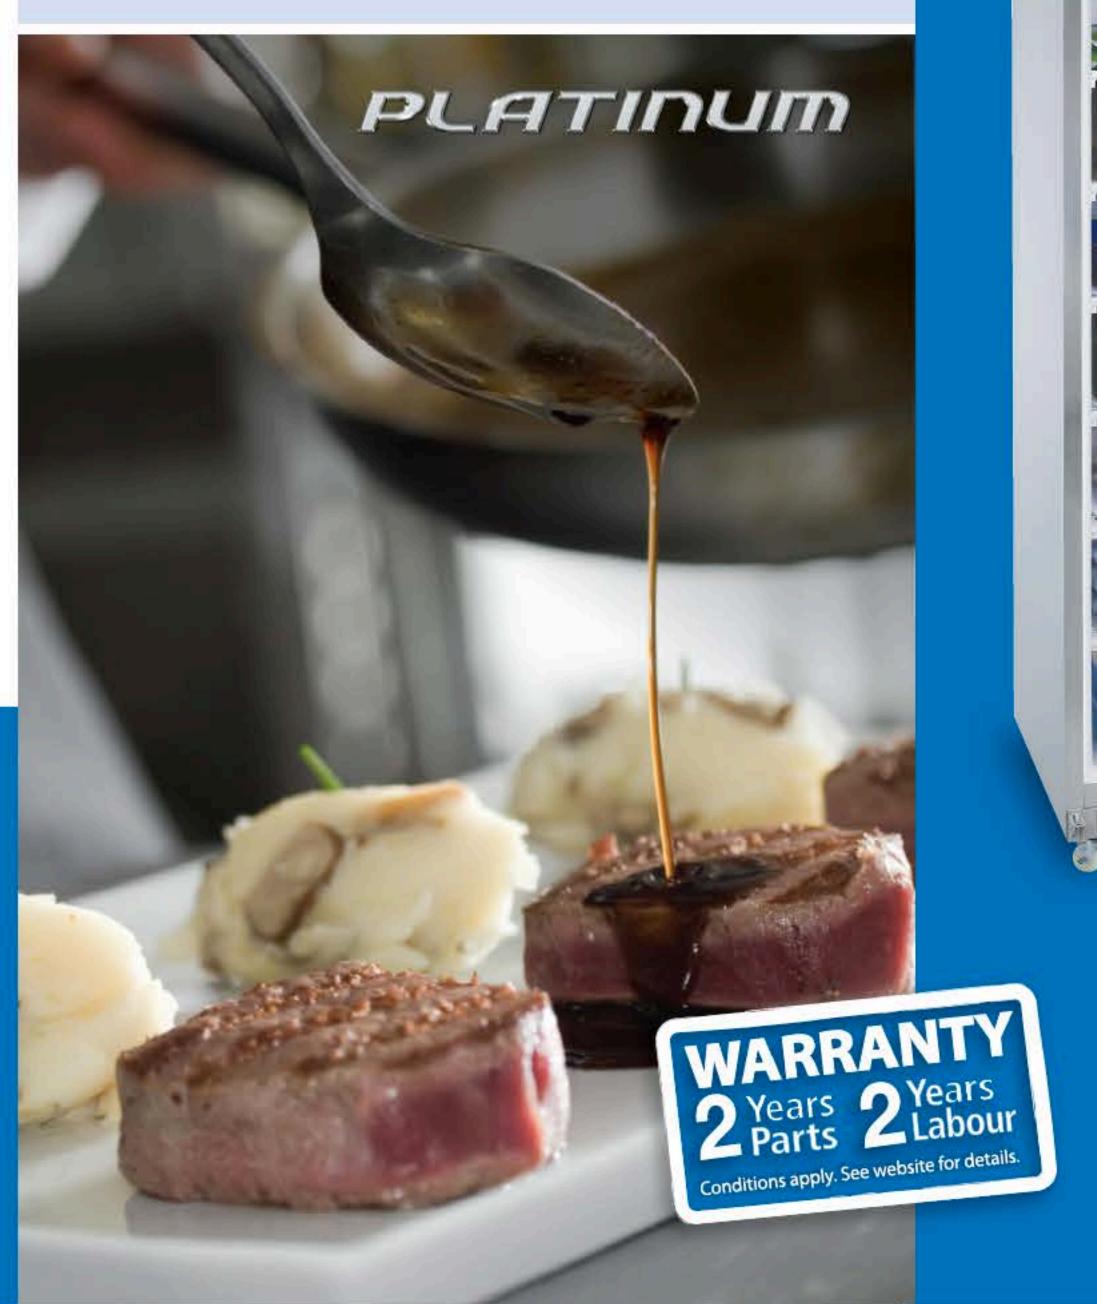

OPERATES IN KITCHENS UP TO 38°C




Gastronorm **Compatible** Range

| Ke | y range features at a glance |
|------------|--|
| 0 | Large 600L capacity offers maximum refrigerated storage space |
| 0 | -18°C to -25°C working temperature range allows you to select your ideal temperature |
| 0 | 6 fixed height shelves for effective stock control |
| 0 | Stylish integrated handle for ease of opening |
| 0 | Solid door models with white or stainless steel finish |
| 0 | 4 fitted castors with two locking at front for ease of movement |
| 0 | Lockable to keep contents secure when needed |
| V | Self-closing door means door cannot be left open accidentally, spoiling contents |
| \bigcirc | Manual defrost for low on-going maintenance |
| 0 | Warning alarms High/low temperature and door open alarms to alert users to a problem |



Always use our fixing bracket (supplied) to prevent accidental tipping when door is open.











SOLID DOOR MODELS

PLATINUM 600L Freezers

| Model | SKU Code | Dimensions hxwxd (mm) | Weight (kg) | Colour |
|----------|-----------|---------------------------------|----------------|--------|
| CFS600W | 444441148 | 1982x775x743 | 105 | W |
| CFS600ST | 444441149 | 1982x775x743 | 105 | SS |







| | 200L FRIDGES | | | | 200L I | REEZERS | | 400L FRIDGES | | | |
|---|----------------------------------|----------------------------------|----------------------------------|-----------------------------------|----------------------------------|----------------------------------|------------------------------------|---------------------------|-------------------------------|-------------------------------|--|
| | | | | | | | | | | | |
| PLATINUM | 200L White | 200L White | 200L Stainless Steel | 200L Stainless Steel | 200L White | 200L Stainless Steel | PLATINUM | 400L White | 400L White | 400L Stainless Steel | |
| Under-counter Range Model Number | Fridge (Solid) CRS200W | Fridge (Glass) CRG200W | Fridge (Solid) CRS200ST | Fridge (Glass) CRG200ST | Freezer (Solid) CFS200W | Freezer (Solid) CFS200ST | Freestanding Range Model Number | Fridge (Solid) CRS400W | | Fridge (Solid) CRS400ST | |
| | UNDEUUT | UNAZOUN | 01020031 | UNAZUUUT | 01-32001 | 01020001 | Model Namber | 0104001 | 0104000 | 01040001 | |
| SKU code | 444441134 | 444441135 | 444441136 | 444441137 | 444441138 | 44441139 | | 444441140 | 444441141 | 444441142 | |
| Barcode | 5052263011342 | 5052263011359 | 5052263011366 | 5052263011373 | 5052263011380 | 5052263011397 | | 5052263011403 | 5052263011410 | 5052263011427 | |
| Product dimensions (mm) (wxdxh) | 595x667*x838 | 595x667*x838 | 595x667*x838 | 595x667*x838 | 595x667*x838 | 595x667*x838 | | 603x653x1960 | 603x671*x1960 | 603x653x1960 | |
| Packed dimensions (mm) (wxdxh) | 650x690x870 | 650x690x870 | 650x690x870 | 650x690x870 | 650x690x870 | 650x690x870 | | 665x715x1985 | 665x715x1985 | 665x715x1985 | |
| Product weight (kg) Packed weight (kg) | 40 | 40 | 40 | 40 45 | 40 | 40 | | 80 | 08 | 80 | |
| Material - exterior finish | White painted steel | White painted steel | Stainless steel | Stainless steel | White painted steel | Stainless steel | | White painted steel | White painted steel | Stainless steel | |
| Material - interior finish | Plastic (ABS/HIPS) | Plastic (ABS/HIPS) | Plastic (ABS/HIPS) | Plastic (ABS/HIPS) | Plastic (ABS/HIPS) | Plastic (ABS/HIPS) | | Plastic (ABS/HIPS) | | Plastic (ABS/HIPS) | |
| Stackable | Yes | Yes | Yes | Yes | Yes | Yes | | No | No | No | |
| Capacity (gross) (L) | 200 | 200 | 200 | 200 | 200 | 200 | | 400 | 400 | 400 | |
| Internal dimensions (mm) (wxdxh) | 477x482x652 | 477x482x652 | 477x482x652 | 477x482x652 | 493x478x634 | 493x478x634 | | 510x468x1640 | 510x468x1640 | 510x468x1640 | |
| Gastronorm compatible | | | | | 100 | | | - | | - | |
| Colour | White | White | Stainless steel | Stainless steel | White | Stainless steel | | White | White | Stainless steel | |
| Internal temperature range | 0°C to 10°C | 0°C to 10°C | 0°C to 10°C Up to 38°C | 0°C to 10°C | -18°C to -25°C Up to 38°C | -18°C to -25°C | | 0°C to 10°C | 0°C to 10°C | 0°C to 10°C | |
| Maximum ambient operating temperature Defrost type | Up to 38°C Auto | Up to 38°C Auto | Auto | Up to 38°C Auto | Manual | Up to 38°C Manual | | Up to 38°C Auto | Up to 38°C Auto | Up to 38°C Auto | |
| Forced air cooling (fan) | Yes | Yes | Yes | Yes | Yes | Yes | | Yes | Yes | Yes | |
| Door type/door style | Solid/hinged reversible | Glass/hinged reversible | Solid/hinged reversible | Glass/hinged reversible | Solid/hinged reversible | Solid/hinged reversible | So | iid/hinged reversible | Glass/hinged reversible | Solid/hinged reversible | |
| Self-closing door | Yes** | No | Yes** | No | Yes** | Yes** | | Yes | No | Yes | |
| Door open depth (mm) | 1200 | 1200 | 1200 | 1200 | 1200 | 1200 | | 1220 | 1220 | 1220 | |
| Replaceable door seal | Yes | Yes | Yes | Yes | Yes | Yes | | Yes | Yes | Yes | |
| Controller type | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic | | Electronic | Electronic | Electronic | |
| Door open sensor/alarm High/low temperature alarms | Yes | Yes | Yes | Yes | Yes Yes | Yes | | Yes | Yes Yes | Yes | |
| External temperature display | Yes | Yes | Yes | Yes | Yes | Yes | | Yes | Yes | Yes | |
| Rollers/castors | 2 adjustable feet/2 rear rollers | 2 adjustable feet/2 rear rollers | 2 adjustable feet/2 rear rollers | 4 fitte | ed castors (2 lockable) | 4 fitted castors (2 lockable) | 4 fitted castors (2 lockable) | |
| Shelves/shelf positions | 2/7 | . 27 | 2/7 | 2/7 | 3 (fixed) | 3 (fixed) | | 5/16 | 5/16 | 5/16 | |
| Shelf size (wxd) | 517x400 | 517x400 | 517x400 | 517x400 | 458x447 | 458x447 | | 502x400 | 502x400 | 502x400 | |
| Shelf material | White plastic-coated wire | White plastic-coated wire | White plastic-coated wire | White plastic-coated wire | Painted aluminium | Painted aluminium | White | plastic-coated wire | White plastic-coated wire | White plastic-coated wire | |
| Internal LED light | Yes | Yes | Yes | Yes | No | No | | Yes | Yes | Yes | |
| Light activation Fitted lock | Automatic - on door open | Automatic - on door open** | Automatic - on door open | Automatic - on door open " Yes | Yes | Yes | AUIO | natic - on door open | Automatic - on door open** | Automauc - on door open | |
| Insulation thickness (mm) | 163 | 165 | 160 | 45 | 165 | 165 | | 163 | 165 | 45 | |
| Insulation material | Pentane | Pentane | Pentane | Pentane | Pentane | Pentane | - | Pentane | Pentane | Pentane | |
| Voltage supply (V) | 220/240 | 220/240 | 220/240 | 220/240 | 220/240 | 220/240 | | 220/240 | | 220/240 | |
| Power rating (KW) | 0.19 | 0.19 | 0.19 | 0.19 | 0.19 | 0.19 | | 0.22 | 0.22 | 0.22 | |
| UK 3 pin plug | Yes | Yes | Yes | Yes | Yes | Yes | | Yes | Yes | Yes | |
| Fitted cable length (M) | 1.8 | 1.8 | 1.8 | 1.8 | 1.8 | 1.8 | | 1.8 | 1.8 | 1.8 | |
| Refrigerant type | R600a | R600a | R600a | R600a | R600a | R600a | | R600a | R600a | R600a | |
| CFC free | Yes | Yes | Yes | Yes | Yes | Yes | | Yes | | Yes | |
| HFC free HCFC free | Yes | Yes | Yes | Yes Yes | Yes Yes | Yes | | Yes | Yes Yes | Yes | |
| Ammonia free | Yes | Yes | Yes | Yes | Yes | Yes | | Yes | Yes | Yes | |
| | 100 | 100 | 100 | 100 | 100 | 100 | | 100 | 165 | 100 | |

*Includes handle depth (40mm) **Feature available from Spring 2012

| | ľ |
|---------|---|
| a: | |
| W 11 | |
| " T | |
| | |
| - | |
| | |
| 7 | l |
| 0 | |
| 5 | |
| 0 | l |
| D. | L |
| | |
|) | l |
| D | l |
| 0 | l |
| 0 | l |
| 3 | |
| | |
| 2 | L |
| G | |
| 0 | L |
| S e | l |
| 1000 | L |
| S | l |
| | L |
| S | |
| С | |
| S | l |
| S | |
| | |
| 4 | |
| 6 | |
| | L |
| e | l |
| S | l |
| n | l |
| S | l |
| 5 | |
| θ | |
| 0 | l |
| | |
| S | |
| · | |
| 8 | |
| | L |
| S | |
| | |
| S | |
| | 1 |


| | | 400L FREEZERS | | | 600L FRIDGES | | | 600L FREEZERS | | |
|---------------------------------------|--|--|---|---|---|---|--|--|--|---|
| | | | | | | | | | | |
| Model Number | 400L Stainless Steel Fridge (Glass) CRG400ST | 400L White Freezer (Solid) CFS400W | 400L Stainless Steel Freezer (Solid) CFS400ST | PLATINUM Gastronorm Range Model Number | 600L White Fridge (Solid) CRS600W | 600L White Fridge (Glass) CRG600W | 600L Stainless Steel Fridge (Solid) CRS600ST | 600L Stainless Steel Fridge (Glass) CRG600ST | 600L White Freezer (Solid) CFS600W | 600L Stainless Steel Freezer (Solid) CFS600ST |
| SKU code | 444441143 | 444441144 | 44441145 | | 444441146 | 444441753 | 444441147 | 444441754 | 44441148 | 44441149 |
| Barcode | 5052263011434 | 5052263011441 | 5052263011458 | | 5052263011465 | 5052263017535 | 5052263011472 | 5052263017542 | 5052263011489 | 5052263011496 |
| Product dimensions (mm) (wxdxh) | 603x671*x1960 | 603x653x1960 | 603x653x1960 | | 775x743x1982 | 775x760*x1982 | 775x743x1982 | 775x760*x1982 | 775x743x1982 | 775x743x1982 |
| Packed dimensions (mm) (wxdxh) | 665x715x1985 | 665x715x1985 | 665x715x1985 | | 835x782x1995 | 835x782x1995 | 835x782x1995 | 835x782x1995 | 835x782x1995 | 835x782x1995 |
| Product weight (kg) | 80 | 85 | 85 | | 101 | 101 | 101 | 101 | 105 | 105 |
| Packed weight (kg) | 96 | 101 | 101 | | 125 | 125 | 125 | 125 | 129 | 129 |
| Material - exterior finish | Stainless steel | White painted steel | Stainless steel | V | hite painted steel | White painted steel | Stainless steel | Stainlesss steel | White painted steel | Stainless steel |
| Material - interior finish | Plastic (ABS/HIPS) | Plastic (ABS/HIPS) | Plastic (ABS/HIPS) | | Plastic (ABS/HIPS) | Plastic (ABS/HIPS) | Plastic (ABS/HIPS) | Plastic (ABS/HIPS) | Plastic (ABS/HIPS) | Plastic (ABS/HIPS |
| Stackable | No | No | No | | No | No | No | No | No | No |
| Capacity (gross) (L) | 400 | 400 | 400 | | 600 | 600 | 600 | 600 | 600 | 600 |
| Internal dimensions (mm) (wxdxh) | 510x468x1640 | 480x448x1623 | 480x448x1623 | | 670x582x1653 | 670x582x1653 | 670x582x1653 | 670x582x1653 | 645x528x1646 | 645x528x1646 |
| | 010A406A1040 | 400744041053 | 400/440/1020 | | Yes 2/1 | Ves 2/1 | Ves 2/1 | Ves 2/1 | Yes 2/1 | Ves 2/1 |
| Gastronorm compatible | Stainless steel | White | Stainless steel | | White | White | Stainless steel | Stainless steel | White | Stainless steel |
| Colour | | -18°C to -25°C | | | tenter a server | | TALL STORE AND A | | HENCE VIEW HERE | I HAR AND A HAR AND A HAR AND A |
| Internal temperature range | 0°C to 10°C | | -18°C to -25°C | | 0°C to 10°C | 0°C to 10°C | 0°C to 10°C | 0°C to 10°C | -18°C to -25°C | -18°C to -25°C |
| Maximum ambient operating temperature | Up to 38°C | Up to 38°C | Up to 38°C | | Up to 38°C | Up to 38°C | Up to 38°C | Up to 38°C | Up to 38°C | Up to 38°C |
| Defrost type | Auto | Manual | Manual | | Auto | Auto | Auto | Auto | Manual | Manual |
| Forced air cooling (fan) | Yes | Yes | Yes | 0.04 | Yes | Yes. | Yes Calld bland assemble | Yes Oferer@leased.counter@lea | Yes | Yes |
| Door type/door style | Glass/hinged reversible | Solid/hinged reversible | Solid/hinged reversible | 2000 | hinged reversible | Glass/hinged reversible | Solid/hinged reversible | Glass/hinged reversible | Solid/hinged reversible | Solid/hinged reversible |
| Self closing door | No | Yes | Yes | | Yes | NO | Yes | No | Yes | Yes |
| Door open depth (mm) | 1220 | 1220 | 1220 | | 1480 | 1480 | 1480 | 1480 | 1480 | 1480 |
| Replaceable door seal | Yes | Yes | Yes | | Yes | Yes | Yes | Yes | Yes | Yes |
| Controller type | Electronic | Electronic | Electronic | | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic |
| Door Open Sensor/alarm | Yes | Yes | Yes | | Yes | Yes | Yes | Yes | Yes | Yes |
| Hi/low temperature alarms | Yes | Yes | Yes | | Yes | Yes | Yes | Yes | Yes | Yes |
| External temperature display | Yes | Yes | Yes | | Yes | Yes | Yes | Yes | Yes | Yes |
| Rollers/castors | 4 fitted castors (2 lockable) | 4 fitted castors (2 lockable) | 4 fitted castors (2 lockable) | 4 fitter | 1 castors (2 lockable) | 4 fitted castors (2 lockable) | 4 fitted castors (2 lockable) | 4 fitted castors (2 lockable) | 4 fitted castors (2 lockable) | 4 fitted castors (2 lockable |
| Shelves/shelf positions | 5/16 | 6 (fixed) | 6 (fixed) | | 5/20 | 5/20 | 5/20 | 5/20 | 6 (fixed) | 6 (fixed |
| Shelf size (wxd) | 502x400 | 422x410 | 422x410 | | 650x530 | 650x530 | 650x530 | 650x530 | 585x493 | 585x493 |
| Shelf material | White plastic-coated wire | Painted aluminium | Painted aluminium | White p | lastic-coated wire | White plastic-coated wire | White plastic-coated wire | White plastic-coated wire | Painted aluminium | Painted aluminium |
| Internal LED light | Yes | No | No | 1 | Yes | Yes | Yes | Yes | No | N |
| Light activation | Automatic - on door open** | | | Automa | tic - on door open | Automatic - on door open** | Automatic - on door open | Automatic - on door open** | 24 | |
| Fitted lock | Yes | Yes | Yes | | Yes | Yes | Yes | Yes | Yes | Yes |
| Insulation thickness (mm) | 45 | 58 | 58 | | 47 | 47 | 47 | 47 | 65 | 65 |
| Insulation material | Pentane | Pentane | Pentane | | Pentane | Pentane | Pentane | Pentane | Pentane | Pentane |
| Voltage supply (V) | 220/240 | 220/240 | 220/240 | | 220/240 | 220/240 | 220/240 | 220/240 | 220/240 | 220/240 |
| Power rating (kW) | 0.22 | 0.22 | 0.22 | | 0.26 | 0.26 | 0.26 | 0.26 | 0.26 | 0.26 |
| UK 3 pin plug | Yes | Yes | Yes | | Yes | Yes | Yes | Yes | Yes | Yes |
| Fitted cable length (M) | 1.8 | 1.8 | 1.8 | | 1.8 | 1.8 | 1.8 | 1.8 | 1.8 | 1. |
| Refrigerant type | R600a | R134a | R134a | | R600a | R600a | R600a | R600a | R134a | R134 |
| CFC free | Yes | Yes | Yes | | Yes | Yes | Yes | Yes | Yes | Yes |
| HFC free | Yes | No | No | | Yes | Yes | Yes | Yes | No | N |
| HCFC free | Yes | Yes | Yes | | Yes | Yes | Yes | Yes | Yes | Yes |
| Ammonia free | Yes | Yes | Yes | | Yes | Yes | Yes | Yes | Yes | Yes |

*Includes handle depth (40mm) **Feature available from Spring 2012

PLFTIDUM visit www.lec-commercial.co.uk for more information



Heavy Duty Fridges and Freezers

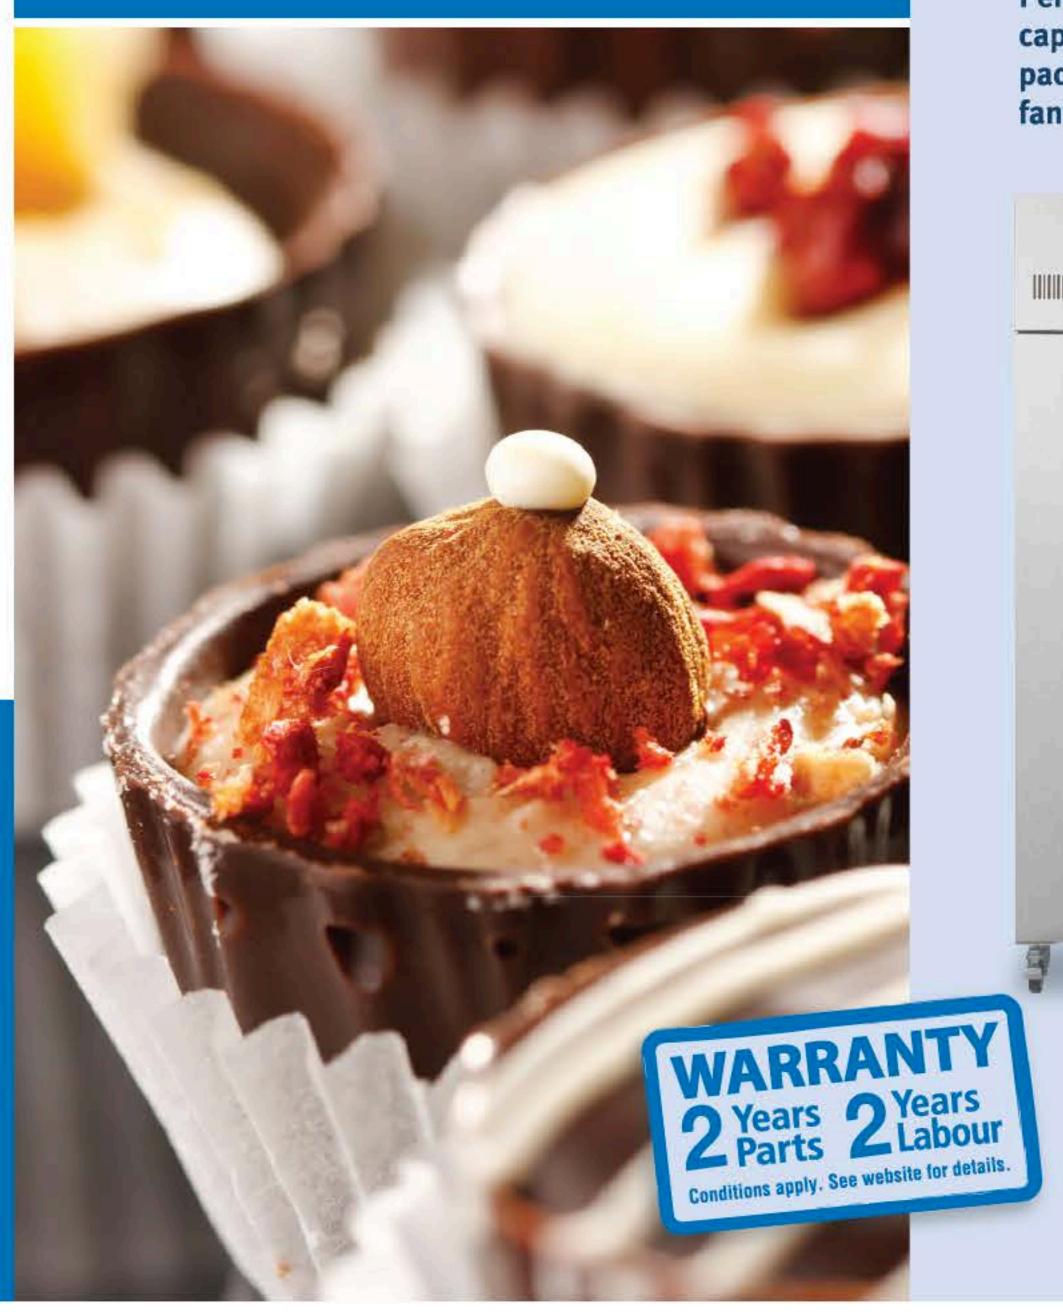

Perfect when you require large storage capacity, our Gastronorm models are packed with user-friendly features, offering fantastic extra storage capacity.


OPERATES IN KITCHENS UP TO 40°C

Gastronorm range





Key range features at a glance

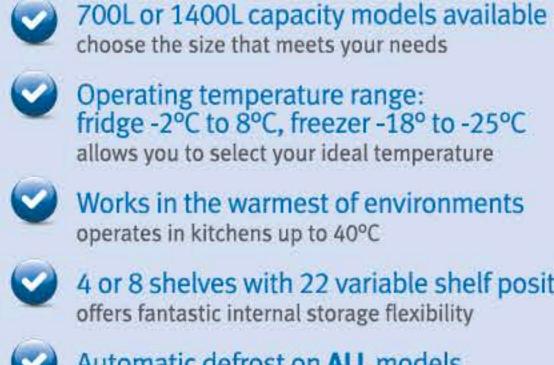

4 or 8 shelves with 22 variable shelf positions offers fantastic internal storage flexibility



Automatic defrost on ALL models for lowest on-going maintenance



Robust stainless steel interior built for heavy use

4 fitted castors with two locking at front for ease of movement



Fitted lock(s) to keep contents secure when needed




Fully integrated handles for ease of opening



Forced air cooling enables rapid temperature recovery after door opening



Reversible doors (700L models only) can be changed from left to right hand opening if situation requires









| | FR | IDGES | FREE | ZERS |
|----------------------------------|--|--|---|---|
| | | | | |
| Gastronorm Range | Gastronorm 700L Fridge CLGN700ST | Gastronorm 1400L Fridge CLGN1400ST | Gastronorm 700L Freezer CUGN700ST | Gastronorn 1400L Freeze CUGN14005 |
| SKU code | 44449448 | 44449450 | 44449449 | 4444945 |
| Barcode | 5034648494483 | 5034648494506 | 5034648494490 | 503464849451 |
| Product dimensions (mm) (wxdxh) | 740x830x2010 | 1430x830x2010 | 740x830x2010 | 1430x830x201 |
| Packed dimensions (mm) (wxdxh) | 785x855x2070 | 1505x855x2070 | 785x855x2070 | 1505x855x207 |
| Product weight (kg) | 134 | 198 | 138 | 20 |
| Packed weight (kg) | 143 | 213 | 147 | 22 |
| Material - exterior finish | Stainless steel | Stainless steel | Stainless steel | Stainless ste |
| Material - interior finish | Stainless steel | Stainless steel | Stainless steel | Stainless ste |
| Capacity (gross/Net) (L) | 700/597 | 1400/1325 | 700/597 | 1400/132 |
| Internal dimensions (mm) (wxdxh) | 624x685x1396 | 1360x685x1390 | 624x685x1396 | 1360x685x139 |
| Gastronorm compatible | Yes (2/1) | Yes (2/1) | Yes (2/1) | Yes (2/ |
| Colour | Stainless steel | Stainless steel | Stainless steel | Stainless ste |
| Internal temperature range | -2°C to +8°C | -2°C to +8°C | -18°C to -25°C | -18°C to -25° |
| Ambient operating temperature | 40°C | 40°C | 40°C | 40° |
| Defrost type | Auto | Auto | Auto | Au |
| Forced air cooling (fan) | Yes | Yes | Yes | Ye |
| Door type/door style | Solid/hinged reversible | Solid | Solid/hinged reversible | Sol |
| Self closing door(s) | Yes | Yes | Yes | Ye |
| Door open depth (mm) | 1259 | 1259 | 1259 | 125 |
| Replaceable door seal(s) | Yes | Yes | Yes | Y |
| Controller type | Electronic | Electronic | Electronic | Electron |
| External temperature display | Yes | Yes | Yes | Yestion |
| Rollers/castors | 4 fitted castors (2 lockable) | 4 fitted castors (2 lockable) | 4 fitted castors (2 lockable) | 4 fitted castors (2 lockabl |
| Shelves/shelf positions | 4/22 | 4 mileu castors (2 lockable) 8/22 | 4 Intel castors (2 lockable) 4/22 | 4 nueu casurs (2 luckau) 8/2 |
| Shelf Size (wxd) | 650x570 | 650x570 | 650x570 | 650x57 |
| Shelf material | Grey plastic-coated wire | Grey plastic-coated wire | Grey plastic-coated wire | Grey plastic-coated wi |
| Internal light | Yes | Yes | Yes | Yesting plastic-coated with |
| Light activation | Internal switch | Internal switch | Internal switch | Internal switch |
| Fitted lock | Yes | Yes (2) | Yes | Yes (|
| Insulation thickness (mm) | 60 | .60 | 60 | 103 (|
| Insulation material | Pentane | Pentane | Pentane | Pentar |
| Voltage supply (V) | 220/240 | 220/240 | 220/240 | 220/24 |
| UK 3 pin plug | Yes | Yes | Yes | Y |
| Refrigerant type | R134a | R134a | R404a | R404 |
| CFC free | Yes | Yes | Yes | Yi |
| HFC free | No | No | No | N |
| HCFC free | Yes | Yes | Yes | Ye |
| Ammonia free | Yes | Yes | Yes | Ye |



Flexible **Chest Freezers**



OPERATES IN KITCHENS UP TO 43°C

Our Range

Lec chest freezers come complete with a stainless steel lid as standard, which can provide a much needed additional preparation surface when space is at a premium.

Our chest freezers are ideal for positioning in storage areas and offer extra frozen storage capacity.







Key range features at a glance

3 sizes available

choose the model that meets your needs



Works in the warmest of environments operates in kitchens up to 43°C

~

Operating temperature range -18°C to -34°C allows you to select your ideal temperature



Fitted lock to keep contents secure when needed

Internal light for good visibility, operates on lid opening



Fitted castors for ease of movement




Temperature warning light alerts user to unit going out of set temperature range



Fast freeze option will freeze contents quickly when needed



Stainless steel lid



provides an additional preparation surface, utilising space effectively



 (\checkmark)

White panel steel base easy to clean

Comes complete with internal storage baskets



| Chest F | reezers | | | | |
|---------|-----------|--------------------------|----------------|-------|--|
| Model | SKU Code | Dimensions hxwxd (mm) | Weight (kg) | Colou | |
| CF295 | 44449453 | 845x1014x720 | 55 | W/SS | |
| CF400 | 44449454 | 845x1304x720 | 67 | W/SS | |
| CF490 | 444449455 | 845x1554x720 | 74 | W/SS | |



Chest Freezer 295L

CF295

Chest Freezers

Model No







Chest Freezer

400L

CF400



| Product dimensions (mm) (wxdxh) 1014x720x845 1304x720x845 Packed dimensions (mm) (wxdxh) 1070x750x880 1360x850x880 Product weight (kg) 55 67 Packed weight (kg) 58 72 | 44449455 5034649494551 1554x720x845 1610x850x880 |
|---|---|
| Product dimensions (mm) (wxdxh) 1014x720x845 1304x720x845 Packed dimensions (mm) (wxdxh) 1070x750x880 1360x850x880 Product weight (kg) 55 67 Packed weight (kg) 58 72 | 1554x720x845 1610x850x880 |
| Packed dimensions (mm) (wxdxh) 1070x750x880 1360x850x880 Product weight (kg) 55 67 Packed weight (kg) 58 72 | 1610x850x880 |
| Product weight (kg) 55 67 Packed weight (kg) 58 72 | |
| Packed weight (kg) 58 72 | |
| | 74 |
| | 78 |
| Material - exterior White painted steel base/stainless steel lid White painted steel base/stainless steel lid White painted steel base | e/stainless steel lid |
| Material - interior Aluminium Aluminium | Aluminium |
| Capacity (gross/net) (L) 295/272 400/371 | 490/455 |
| Internal dimensions (mm) (wxdxh) 890x510x705 1180x510x705 | 1430x510x705 |
| Colour White base/stainless steel lid White base/stainless steel lid White base/stainless steel lid | stainless steel lid |
| Internal temperature range -18°C to -34°C -18°C to -34°C | -18°C to -34°C |
| Ambient operating temperature Up to 43°C Up to 43°C | Up to 43°C |
| Defrost type Manual Manual | Manual |
| Lid type Hinged Hinged | Hinged |
| Lid open height (mm) 1540 1540 | 1540 |
| Controller type Electronic Electronic | Electronic |
| External temperature display Yes Yes | Yes |
| Rollers/castors Fitted castors Fitted castors | Fitted castors |
| Baskets 2 2 | 3 |
| Internal light (10W) Yes Yes | Yes |
| Light activation By lid opening By lid opening | By lid opening |
| Fitted lock Yes Yes | Yes |
| Insulation thickness (mm) 60 60 | 60 |
| Insulation material Polyurethane Polyurethane | Polyurethane |
| Voltage supply (V) 220/240 220/240 | 220/240 |
| UK 3 pin plug Yes Yes | Yes |
| Fitted cable length (M) 2 2 | 2 |
| Refrigerant type R134a R134a | R134a |
| CFC free Yes Yes | Yes |
| HFC free No No | No |
| HCFC free Yes Yes | Yes |
| Ammonia free Yes Yes | Yes |

We have a range of other catering equipment products available - please visit our website for details

visit www.lec-commercial.co.uk for more information









Sales Enquiries:

email: sales@gdpa.co.uk tel: 0844 815 3742 fax: 0844 815 3748

Marketing Enquiries: email: marketing@gdpa.co.uk tel: 0844 248 4274

Spares and After Sales Service:

email: info@gdha.com tel: 0844 815 3755 fax: 0844 815 3748

For all International (Non-UK) Enquiries: email: sales@gdpa.co.uk tel: +44 151 493 3281 fax: +44 151 432 7082

Address: **Glen Dimplex Professional Appliances** Stoney Lane, Prescot Merseyside L35 2XW

For any other information, please visit: www.burco.co.uk www.lec-commercial.co.uk



Glen Dimplex Professional Appliances is part of the Glen Dimplex Group

Glen Dimplex Professional Appliances operates the policy of continual improvement and development. Therefore we reserve the right to change the specification of any product without prior notice. All dimensions in the publication are approximate. Information correct at time of going to print. Please note that ongoing product improvement may result in minor changes in product technical specification. Where possible this will be communicated prior to supply. Please contact customer services for further information. E&OE.