



WATER



GAS



ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS

SUITABILITY: Light Medium Heavy


DECK MOUNTED - SINGLE FEED

SINGLE HOLE SINGLE WATER FEED ONE CONTROL

1/2" CROSS HEAD BASIN TAPS



CATERTAP



Worktop hole: 25mm,
Recommended working pressure 1-3 bar


Model	Description
500BX	1/2-inch Basin Taps (pair)



1/2" CROSS HEAD BASIN TAPS



PEGLER YORKSHIRE



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar


Model	Description
1/2-159PR	1/2-inch Basin Taps (pair)



1/2" DOME HEAD BASIN TAPS



DELABIE




Model	Description
DLB-D-2550	1/2-inch Basin Tap (sold individually)



1/2" CROSS HEAD BASIN TAPS



PEGLER YORKSHIRE



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
1/2-2159PR	1/2-inch Basin Taps (pair)




1/2" CROSS HEAD BASIN TAPS

WRAS
APPROVED
PRODUCT



PEGLER YORKSHIRE



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar


Model	Description
WR-500BX	1/2-inch Basin Taps (pair)



1/2" DOME HEAD BASIN TAPS



CATERTAP



Worktop hole: 25mm,
Recommended working pressure 1-3 bar

Model	Description
500BD	1/2-inch Basin Taps (pair)





WATER



GAS



ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS

SUITABILITY: Light Medium Heavy

DECK MOUNTED - SINGLE FEED


SINGLE HOLE SINGLE WATER FEED ONE CONTROL

1/2" DOME HEAD BASIN TAPS

WRAS
APPROVED
PRODUCT



Pegler Yorkshire




Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
WR-500BD	1/2-inch Basin Taps (pair)



1/2" SINGLE BASIN TAP WITH 3-INCH LEVER

CATERTAP



Worktop hole: 25mm,
Recommended working pressure 1-3 bar

Model	Description
500BL3-Single	1/2-inch Basin Tap* (sold individually)


*mixing valve recommended



1/2" BASIN TAPS WITH 3-INCH LEVERS



Pegler Yorkshire



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
1/22159QT	1/2-inch Basin Taps (pair)



CATERCONNEX

MECHLINE ORIGINAL AQUAVEND® SERIES FOOD GRADE DRINKING WATER HOSES



See pages 73-74 for details

1/2" BASIN TAPS WITH 3-INCH LEVERS

CATERTAP



Worktop hole: 25mm,
Recommended working pressure 1-3 bar

Model	Description
500BL3	1/2-inch Basin Taps (pair)



1/2" BASIN TAPS WITH 3-INCH LEVERS

WRAS
APPROVED
PRODUCT



Pegler Yorkshire



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
WR-500BL3	1/2-inch Basin Taps (pair)





WATER



GAS



ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS

SUITABILITY: Light Medium Heavy

DECK MOUNTED - SINGLE FEED

SINGLE HOLE SINGLE WATER FEED ONE CONTROL

1/2" BASIN TAPS WITH 6-INCH LEVERS



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
1/22159QTELCP	1/2-inch Basin Taps (pair)



1/2" BASIN TAPS WITH SNUB LEVERS




Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
1/22159QTSLCP	1/2-inch Basin Taps (pair)



1/2" CROSS HEAD SINK TAPS

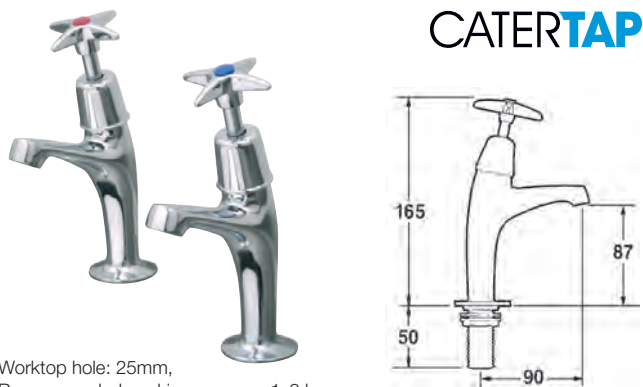

Worktop hole: 25mm,
Recommended working pressure 1-3 bar

Model	Description
500SX	1/2-inch Sink Taps (pair)



1/2" CROSS HEAD SINK TAPS



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
1/2-2158HNPR	1/2-inch Sink Taps (pair)



1/2" CROSS HEAD SINK TAPS



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
1/2-159HNPR	1/2-inch Sink Taps (pair)



1/2" CROSS HEAD SINK TAPS



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
WR-500SX	1/2-inch Sink Taps (pair)





WATER



GAS



ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS

SUITABILITY: Light Medium Heavy

DECK MOUNTED - SINGLE FEED

SINGLE HOLE SINGLE WATER FEED ONE CONTROL

3/4" CROSS HEAD SINK TAPS

Pegler Yorkshire

Worktop hole: 30mm,
Recommended working pressure 0.2-6 bar

Model	Description
3/4159HNPR	3/4-inch Sink Taps (pair)

1/2" DOME HEAD SINK TAPS

CATERTAP

Worktop hole: 25mm,
Recommended working pressure 1-3 bar

Model	Description
500SD	1/2-inch Sink Taps (pair)

1/2" DOME HEAD SINK TAPS

Pegler Yorkshire

Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
P502	1/2-inch Sink Taps (pair)

1/2" DOME HEAD SINK TAPS

WRAS APPROVED PRODUCT

Pegler Yorkshire

Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
WR-500SD	1/2-inch Sink Taps (pair)

1/2" SINK TAPS WITH 3-INCH LEVERS

CATERTAP

Worktop hole: 25mm,
Recommended working pressure 1-3 bar

Model	Description
500SL3	1/2-inch Sink Taps (pair)

1/2" SINK TAPS WITH 3-INCH LEVERS

Pegler Yorkshire

Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
1/22158QT	1/2-inch Sink Taps (pair)



WATER



GAS



ENVIRONMENT



PEST CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS

SUITABILITY: Light Medium Heavy

DECK MOUNTED - SINGLE FEED


SINGLE HOLE SINGLE WATER FEED ONE CONTROL

1/2" SINK TAPS WITH 3-INCH LEVERS

WRAS
APPROVED
PRODUCT



Pegler Yorkshire



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar


Model	Description
WR-500SL3	1/2-inch Sink Taps (pair)



1/2" SINK TAPS WITH 6-INCH LEVERS



Pegler Yorkshire



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar


Model	Description
1/22158QTELCF	1/2-inch Sink Taps (pair)



1/2" SINK TAPS WITH SNUB LEVERS



Pegler Yorkshire




Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
1/22158QTSCLCP	1/2-inch Sink Taps (pair)



1/2" DOME HEAD SINK TAP WITH SWIVEL SPOUT

DELABIE



Sold individually.

Model	Description
DLB-D-2553	150mm Swivel Spout



CATERCONNEX

A RANGE OF WRAS APPROVED BRAIDED & FOOD SERVICE WATER HOSES FOR VARIOUS APPLICATIONS. INCLUDING THE INDUSTRY RECOGNISED FOOD-GRADE HOSES, PEX AQUAVEND DRINKING WATER HOSES.



See pages 71-76 for details



WATER



GAS



ENVIRONMENT



PEST CONTROL


KITCHEN FAUCETS/TAPS & SPOUTS

SUITABILITY: Light Medium Heavy

DECK MOUNTED - SINGLE FEED

SINGLE HOLE SINGLE WATER FEED ONE CONTROL

1/2" SINK TAP WITH LEVER CONTROL AND SWIVEL SPOUT

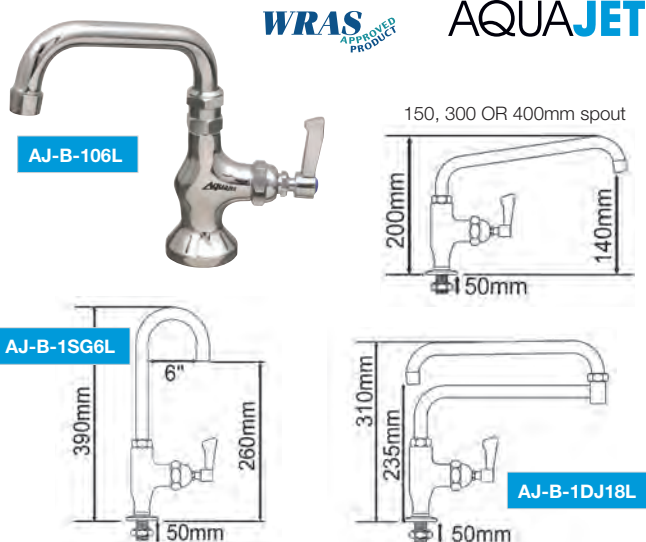

Worktop hole: 25mm, Recommended working pressure 1.5-5 bar

Model	Description
AJ-B-106L	150mm Swivel Spout
AJ-B-112L	300mm Swivel Spout
AJ-B-116L	400mm Swivel Spout
AJ-B-1DJ18L	450mm Double Jointed Spout
AJ-B-1SG6L	150mm Swivel Gooseneck Spout



3/4" DOME HEAD SINK TAP WITH SWIVEL SPOUT

GASTROTECHNIX



Worktop hole: 35mm, Flow rate: 3 bar / L per M: 90

Model	Description
GX6947-15-25	250mm Spout, H235mm
GX6947-15-40	400mm Spout, H235mm
GX6947-24-30	300mm Spout, H325mm



1/2" DOME HEAD SINK TAP WITH SWIVEL SPOUT

GASTROTECHNIX




Worktop hole: 25mm, Flow rate: 3 bar / L per M: 30

Model	Description
GX6632-20	200mm Spout, H280mm
GX6632-25	250mm Spout, H280mm
GX6632-F20	Flat 200mm Spout, H130mm



3/4" DOME HEAD SINK TAP WITH SWIVEL SPOUT

GASTROTECHNIX

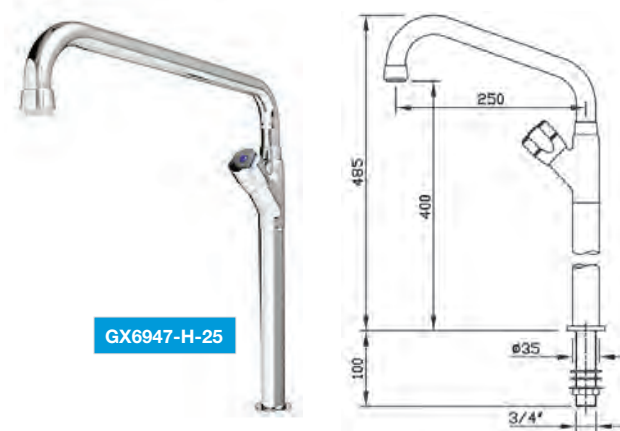

Worktop hole: 35mm, Flow rate: 3 bar / L per M: 90

Model	Description
GX6947-H-25	250mm Spout, H485mm
GX6947-H-40	400mm Spout, H485mm
GX6947-H-T40/60	Telescopic Spout - 400-600mm, H530mm

SUITABILITY: Light Medium Heavy

SINGLE HOLE TWIN WATER FEED ONE CONTROL



See pages 55-62 for details



WATER



GAS



ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS

SUITABILITY: Light Medium Heavy

DECK MOUNTED - MONOBLOCK MIXER

SINGLE HOLE TWIN WATER FEED ONE CONTROL

3/8" MIXER TAP WITH LEVER CONTROL AND SWIVEL SPOUT

GASTROTECHNIX




Worktop hole: 30mm, Flow rate: 3 bar / L per M: 25

Model	Description
GX6644-H-30	300mm Spout, H375mm



3/4" MIXER TAP WITH LEVER CONTROL AND SWIVEL SPOUT

GASTROTECHNIX

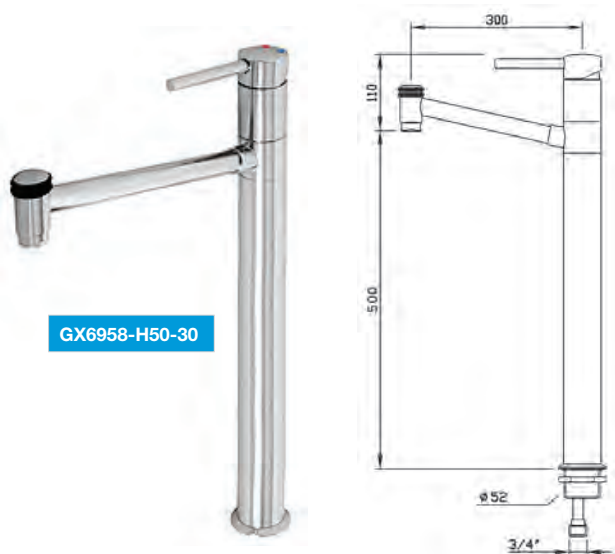

GX6958-H50-30

Worktop hole: 52mm, Flow rate: 3 bar / L per M: 42

Model	Description
GX6958-H50-30	300mm Spout, H610mm
GX6958-H50-40	400mm Spout, H610mm



1/2" MIXER TAP WITH LEVER CONTROL AND SWIVEL SPOUT

GASTROTECHNIX



GX6958-20-30

GX6858L-20-30


Worktop hole: 50mm, Flow rate: 3 bar / L per M: 25

Model	Description
GX6958-20-30	250mm Spout, H250mm
GX6858L-20-30	250mm Spout, H310mm w/long lever



3/4" MIXER TAP WITH LEVER CONTROL AND SWIVEL SPOUT

GASTROTECHNIX

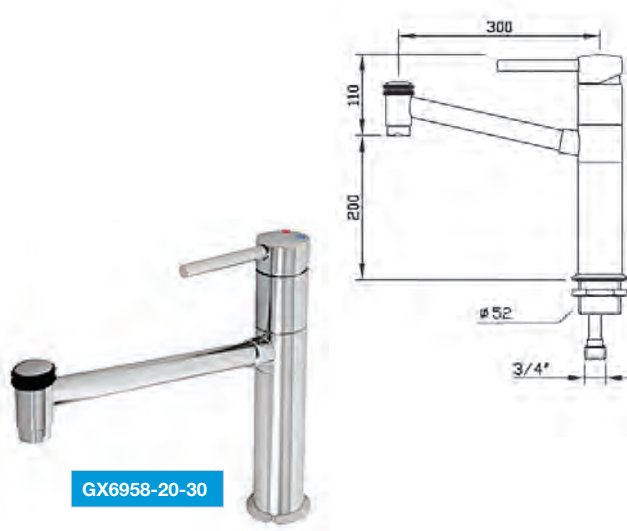

GX6958-20-30

Worktop hole: 52mm, Flow rate: 3 bar / L per M: 42

Model	Description
GX6958-20-30	300mm Spout, H310mm
GX6958-20-40	400mm Spout, H310mm





WATER



GAS



ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS

SUITABILITY: Light Medium Heavy


DECK MOUNTED - MONOBLOCK MIXER

SINGLE HOLE TWIN WATER FEED TWO CONTROLS

1/2" MIXER TAP WITH LEVER CONTROLS AND SWIVEL SPOUT


AQUAJET

WRAS
APPROVED
PRODUCT




Worktop hole: 30mm, Recommended working pressure 1.5-5 bar

Model	Description
AJ-B-206L	150mm Swivel Spout
AJ-B-212L	300mm Swivel Spout
AJ-B-216L	400mm Swivel Spout
AJ-B-2DJ18L	450mm Double Jointed Spout
AJ-B-2SG6L	150mm Swivel Gooseneck Spout



AJ-B-2DJ18L



AJ-B-2SG6L



AQUAJET

STOP POURING YOUR
PROFITS DOWN THE
PLUG-HOLE


SAVE MONEY WITH A
WATER-SAVING GUN



See pages 7-17 for details

1/2" DOME HEAD MIXER TAP WITH SWIVEL SPOUT

DELABIE

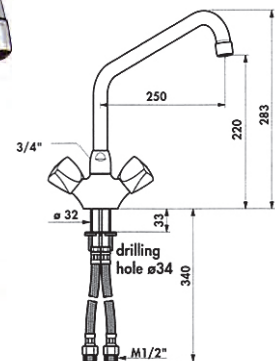

15mm for compression fittings

Model	Description
DLB-G664415	250mm Swivel Spout, H220mm



WALL MOUNTED AND
DECK MOUNTED SOAP
DISPENSERS



See page 69 for details



WATER



GAS



ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS


SUITABILITY: Light Medium Heavy

DECK MOUNTED - MONOBLOCK MIXER

SINGLE HOLE TWIN WATER FEED TWO CONTROL

3/4" DOME HEAD MIXER TAP WITH SWIVEL SPOUT

GASTROTECHNIX

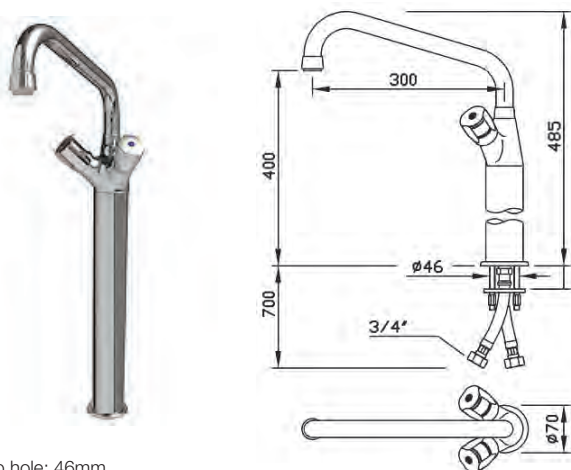


Worktop hole: 46mm,
Flow rate: 3 bar / L per M: 92, 5 bar / L per M: 104

Model	Description	
GX6927-H40-30	300mm Spout, H485mm	
GX6927-H50-30	300mm Spout, H585mm	
GX6927-H40-50	500mm Spout, H485mm	
GX6927-H50-50	500mm Spout, H585mm	



3/4" DOME HEAD MIXER TAP WITH SWIVEL SPOUT

GASTROTECHNIX

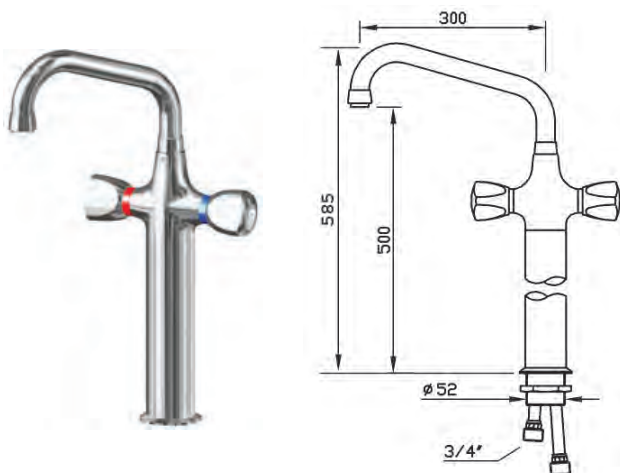


Worktop hole: 52mm,
Flow rate: 3 bar / L per M: 92, 5 bar / L per M: 104

Model	Description	
GX6957-H50-30	300mm Spout, H585mm	
GX6957-H50-40	400mm Spout, H585mm	
GX6957-H50-50	500mm Spout, H585mm	



3/4" DOME HEAD MIXER TAP WITH SWIVEL SPOUT

GASTROTECHNIX

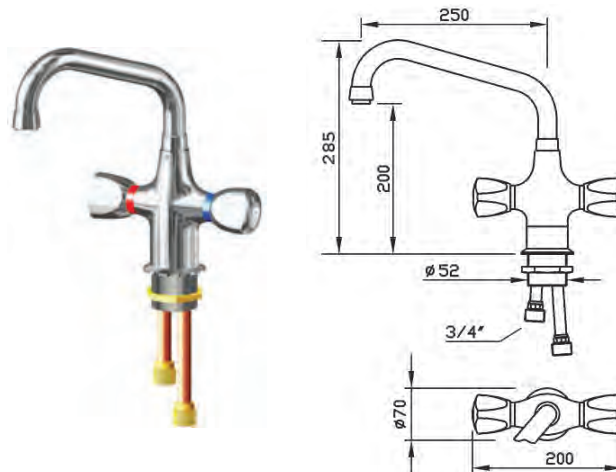

Worktop hole: 52mm,
Flow rate: 3 bar / L per M: 92, 5 bar / L per M: 104

Model	Description	
GX6957-20-25	250mm Spout, H285mm	
GX6957-20-30	300mm Spout, H285mm	
GX6957-20-40	400mm Spout, H285mm	



GASTROTECHNIX

**A RANGE OF PREMIUM
QUALITY PRE-RINSES,
DESIGNED FOR
PROFESSIONAL
FOODSERVICE
OPERATIONS**



See pages 25-28 for details



WATER



GAS



ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS


SUITABILITY: Light Medium Heavy

DECK MOUNTED - MONOBLOCK MIXER

SINGLE HOLE TWIN WATER FEED TWO CONTROLS

1/2" DOME HEAD MIXER TAP WITH SWIVEL SPOUT

GASTROTECHNIX

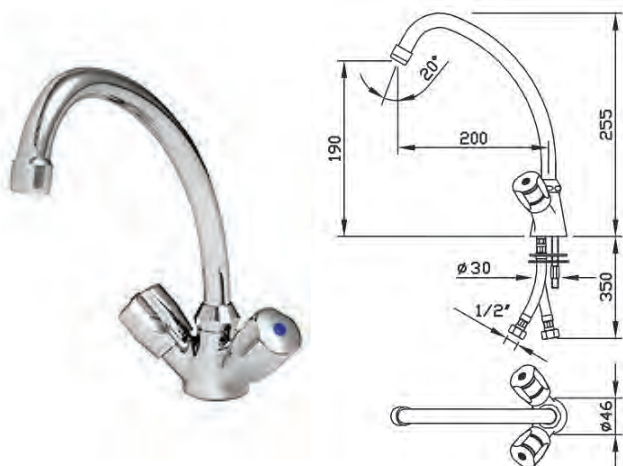


Worktop hole: 30mm,
Flow rate: 3 bar / L per M: 30, 5 bar / L per M: 36

Model	Description
GX6480-20	200mm Spout, H255mm
GX6480-25	250mm Spout, H270mm



1/2" DOME HEAD MIXER TAP WITH SWIVEL SPOUT

GASTROTECHNIX

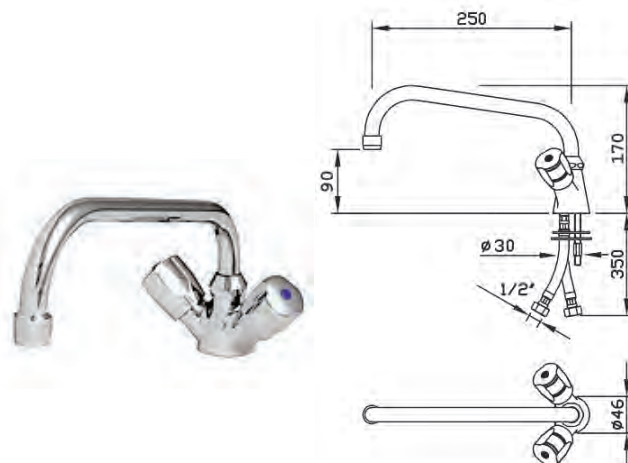

Worktop hole: 30mm,
Flow rate: 3 bar / L per M: 30, 5 bar / L per M: 36

Model	Description
GX6480-F25	Flat 250mm Spout, H170mm
GX6480-F30	Flat 300mm Spout, H170mm



1/2" DOME HEAD MIXER TAP WITH SWIVEL SPOUT

GASTROTECHNIX



Worktop hole: 28-30mm,
Flow rate: 3 bar / L per M: 30, 5 bar / L per M: 36

Model	Description
GX6480-H30-25	250mm Spout, H380mm
GX6480-H45-25	250mm Spout, H530mm
GX6480-H30-30	300mm Spout, H380mm
GX6480-H45-30	300mm Spout, H530mm



3/4" DOME HEAD MIXER TAP WITH SWIVEL SPOUT

GASTROTECHNIX



Worktop hole: 46mm,
Flow rate: 3 bar / L per M: 92, 5 bar / L per M: 104

Model	Description
GX6927-F25	Flat 250mm Spout, H225mm
GX6927-F30	Flat 300mm Spout, H225mm
GX6927-F40	Flat 400mm Spout, H225mm
GX6927-S30	300mm Spout, H315mm





WATER



GAS



ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS


SUITABILITY: Light Medium Heavy

DECK MOUNTED - TWIN MIXER

TWIN HOLE TWIN WATER FEED TWO CONTROLS

1/2" CROSS HEAD MIXER WITH SWIVEL SPOUT

CATERTAP

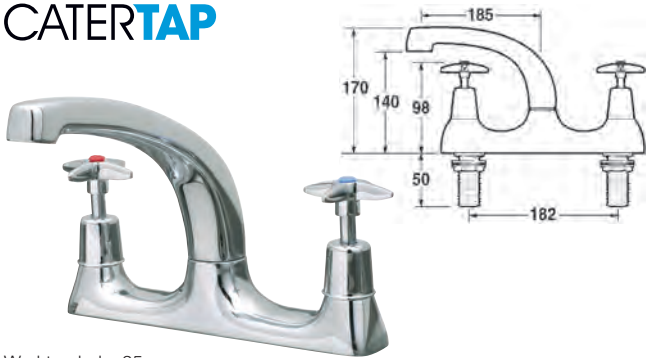

Worktop hole: 25mm,
Recommended working pressure 1-3 bar

Model	Description
500MX	1/2-inch Deck Mixer



1/2" CROSS HEAD MIXER WITH SWIVEL SPOUT



Pegler Yorkshire



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
2523	1/2-inch Dualflow Mixer



1/2" CROSS HEAD MIXER WITH SWIVEL SPOUT

WRAS
APPROVED
PRODUCT



Pegler Yorkshire




Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
WR-500MX	1/2-inch Deck Mixer



1/2" DOME HEAD DECK MIXER WITH SWIVEL SPOUT

CATERTAP

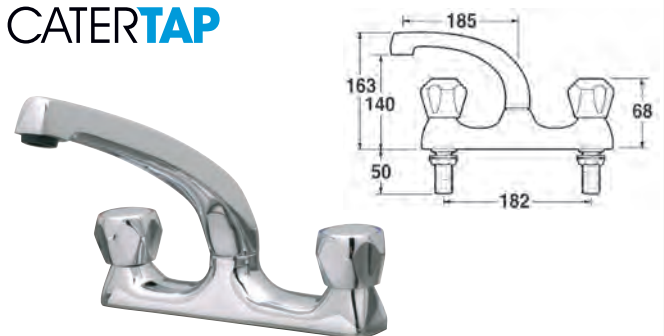

Worktop hole: 25mm,
Recommended working pressure 1-3 bar

Model	Description
500MD	1/2-inch Deck Mixer



1/2" DOME HEAD MIXER WITH SWIVEL SPOUT

WRAS
APPROVED
PRODUCT



Pegler Yorkshire



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
WR-500MD	1/2-inch Deck Mixer



BASIX

IMPROVE WATER
SAVING AND
HYGIENE WITH
A HANDS-FREE
WASH STATION



See pages 63-70 for details



WATER



GAS



ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS


SUITABILITY: Light Medium Heavy

DECK MOUNTED - TWIN MIXER

TWIN HOLE TWO WATER FEED TWO CONTROLS

1/2" DOME HEAD MIXER WITH SWIVEL SPOUT

GASTROTECHNIX

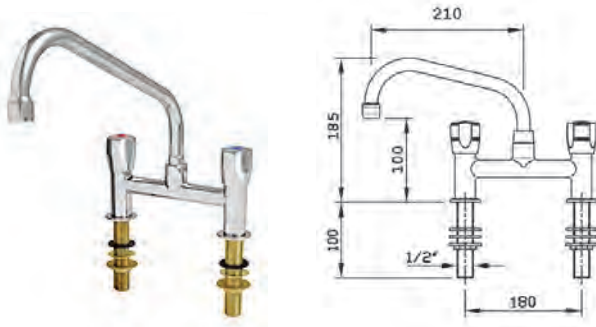


Worktop hole: 25mm, Flow rate: 3 bar / L per M: 30

Model	Description
GX6925-25	210mm Spout, H185mm
GX6925-30	300mm Spout, H325mm
GX6925-40	400mm Spout, H325mm



1/2" DOME HEAD MIXER WITH SWIVEL SPOUT

DELABIE

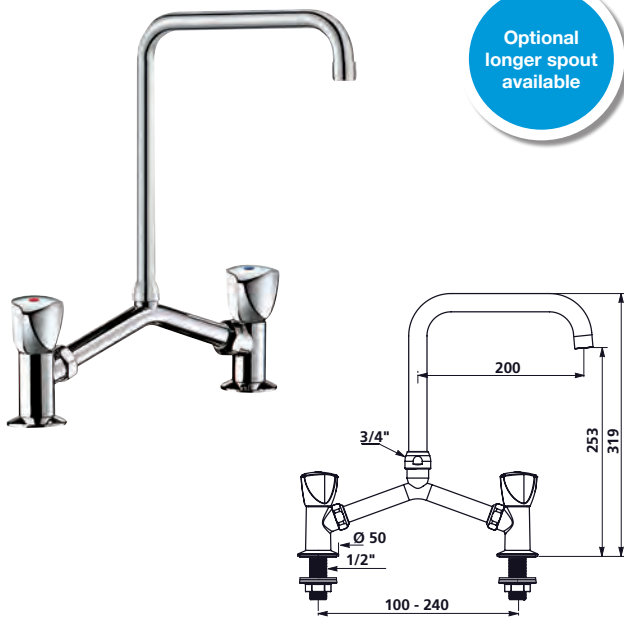


Model	Description
DLB-G65602	1/2-inch Deck Mixer

Supplied as a built unit with centres at 180mm. If required, it can be supplied loose allowing centres to be set between 100-240mm. Please specify when ordering.



3/4" DOME HEAD MIXER WITH SWIVEL SPOUT

GASTROTECHNIX

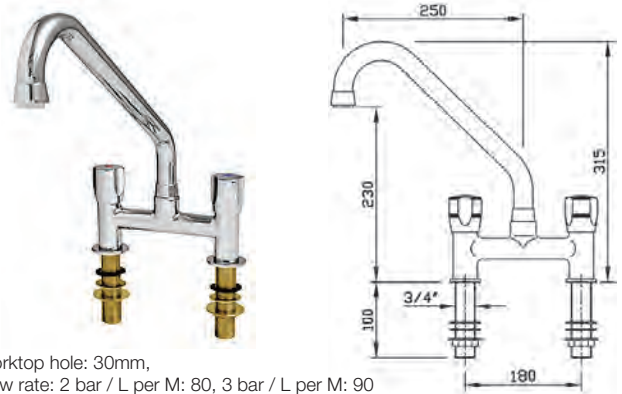

Worktop hole: 30mm, Flow rate: 2 bar / L per M: 80, 3 bar / L per M: 90


Model	Description
GX6935-25	250mm Spout, H315mm
GX6935-30	300mm Spout, H315mm
GX6935-40	400mm Spout, H315mm



1/2" MIXER WITH LEVER CONTROLS AND SWIVEL SPOUT

AQUAJET

WRAS
APPROVED
PRODUCT

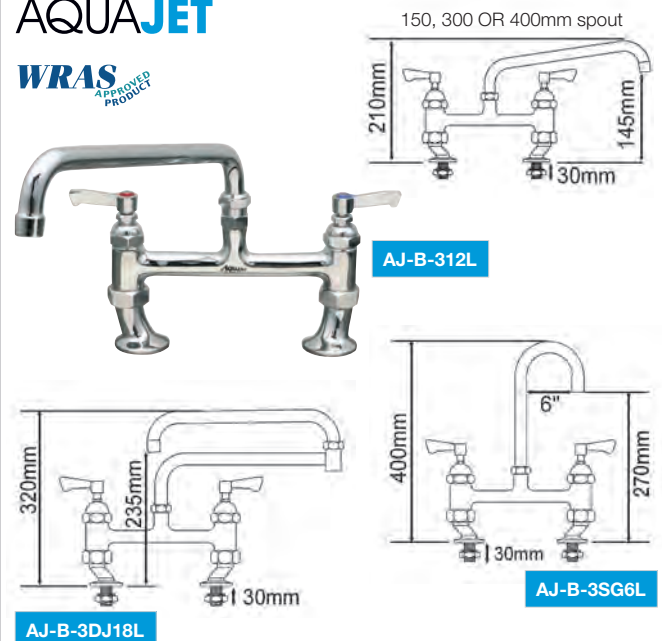

Worktop hole: 25mm, Recommended working pressure 1.5-5 bar

Model	Description
AJ-B-306L	150mm Swivel Spout
AJ-B-312L	300mm Swivel Spout
AJ-B-316L	400mm Swivel Spout
AJ-B-3DJ18L	450mm Double Jointed Spout
AJ-B-3SG6L	150mm Swivel Gooseneck Spout





WATER



GAS



ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS


SUITABILITY: Light Medium Heavy

DECK MOUNTED - TWIN MIXER

TWIN HOLE TWO WATER FEED TWO CONTROLS

1/2" MIXER WITH 3-INCH LEVERS AND SWIVEL SPOUT

CATERTAP

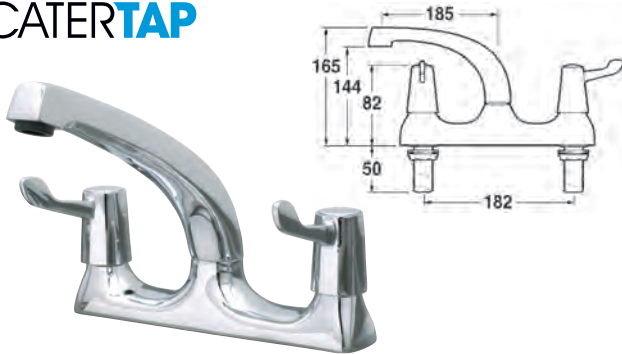

Worktop hole: 25mm,
Recommended working pressure 1-3 bar


Model	Description
500ML3	1/2-inch Deck Mixer



1/2" MIXER WITH 3-INCH LEVERS AND SWIVEL SPOUT



Pegler Yorkshire



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
2523QT	1/2-inch Deck Mixer



1/2" MIXER WITH 6-INCH LEVERS AND SWIVEL SPOUT



Pegler Yorkshire



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
2523QTELCP	1/2-inch Deck Mixer



CATERZAP

POWERFUL
ELECTRIC GRID
FLYING INSECT
KILLERS




See pages 107-108 for details

1/2" MIXER WITH 3-INCH LEVERS AND SWIVEL SPOUT

WRAS
APPROVED
PRODUCT



Pegler Yorkshire



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar


Model	Description
WR-500ML3	1/2-inch Deck Mixer



1/2" MIXER WITH SNUB LEVERS AND SWIVEL SPOUT



Pegler Yorkshire



Worktop hole: 25mm,
Recommended working pressure 0.2-6 bar

Model	Description
2523QTSCLCP	1/2-inch Deck Mixer





WATER



GAS



ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS


SUITABILITY: Light Medium Heavy

PANEL MOUNTED - SINGLE FEED

SINGLE HOLE SINGLE WATER FEED ONE CONTROL

1/2" TAPS WITH LEVER CONTROL AND SWIVEL SPOUT

AQUAJET

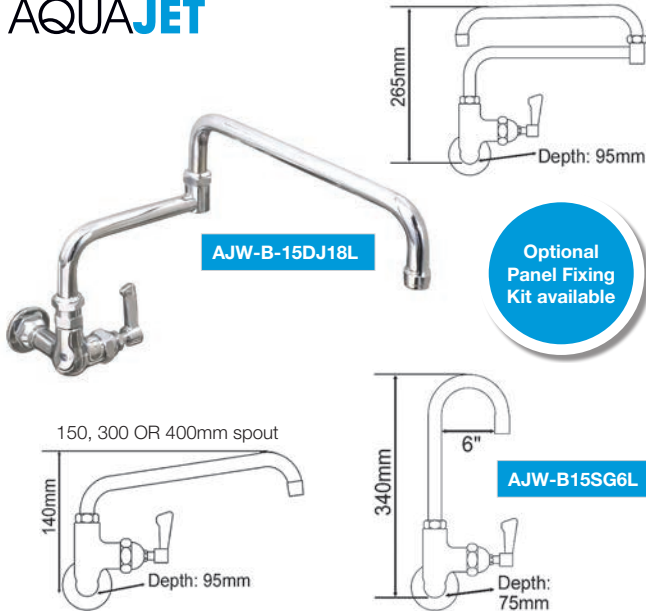

Panel hole: 25mm, Recommended working pressure 1.5-5 bar

Model	Description
AJW-B-1506L	150mm Swivel Spout
AJW-1512L	300mm Swivel Spout
AJW-B-1516L	400mm Swivel Spout
AJW-B-15DJ18L	450mm Double Jointed Spout
AJW-B15SG6L	150mm Swivel Gooseneck Spout
AJ-PANelfix-KIT	Optional Panel-fixing kit (sold separately)

1/2" DOME HEAD BIB TAP WITH SWIVEL SPOUT

GASTROTECHNIX




Panel hole: 25mm, Flow rate: 3 bar / L per M: 20

Model	Description
GX2401-25	250mm Spout, H140mm
GX2401-T20/30	Telescopic Spout 200-300mm, H140mm
GX2401-T28/48	Telescopic Spout 280-480mm, H140mm
GX2401-T35/60	Telescopic Spout 350-600mm, H140mm
GX2401BP	OPTION: Backplate Elbow M 1/2-in / F 1/2-in

WALL MOUNTED - SINGLE FEED

SINGLE HOLE SINGLE WATER FEED ONE CONTROL

1/2" CROSS HEAD BIB TAP

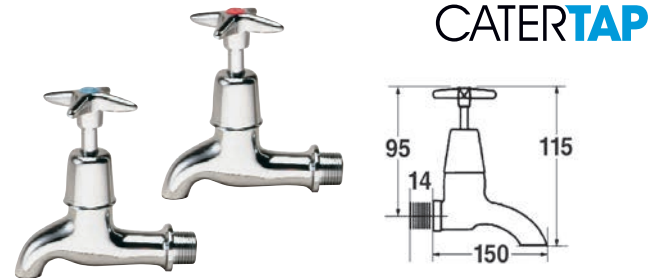


Tap hole: 25mm, Recommended working pressure 1-3 bar

Model	Description
500WX-HOT	1/2-inch Bib Tap - HOT (sold individually)
500WX-COLD	1/2-inch Bib Tap - COLD (sold individually)
500BTBP	(Elbow) Backplate - chrome (sold individually)

1/2" DOME HEAD BIB TAP WITH SWIVEL SPOUT


DELABIE

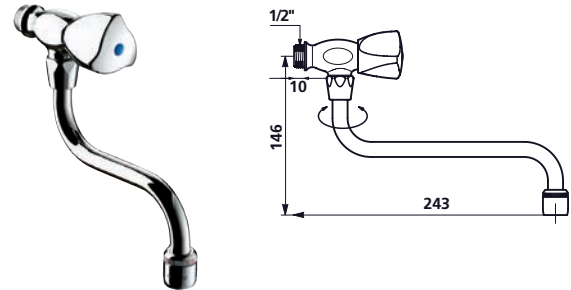

Model	Description
DLB-D-275-200	200mm fixed spout, scale-proof aerator

1/2" DOME HEAD STOP VALVE

DELABIE

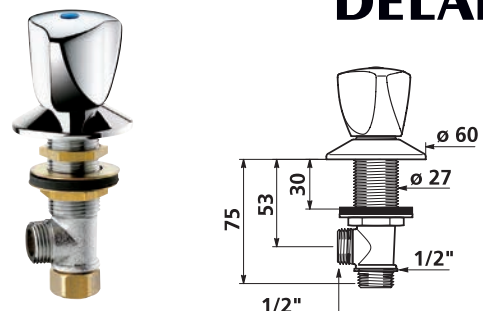

Model	Description
DLB-D-273015	Tap control (stop valve) for spouts M 1/2-inch



WATER



GAS



ENVIRONMENT



PEST CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS

SUITABILITY: Light Medium Heavy

PANEL MOUNTED - TWIN MIXER

TWIN HOLE TWIN WATER FEED TWO CONTROLS

1/2" MIXER WITH LEVER CONTROLS & SWIVEL SPOUT


AQUAJET




AJ-W-412L

Optional Panel Fixing Kit available

AJ-W-4SG6L



AJ-W-4DJ18L



Panel hole: 25mm, Recommended working pressure 1.5-5 bar

Model	Description
AJ-W-406L	150mm Swivel Spout
AJ-W-412L	300mm Swivel Spout
AJ-W-416L	400mm Swivel Spout
AJ-W-4DJ18L	450mm Double Jointed Spout
AJ-W-4SG6L	150mm Swivel Gooseneck Spout
AJ-PANELFIX-KIT	Optional Panel-fixing kit (sold separately)

1/2" DOME HEAD MIXER WITH SWIVEL SPOUT

CATER




Tap hole: 25mm,
Recommended working pressure 1-3 bar


Model	Description
500MDW	1/2-inch Mixer Tap

1/2" DOME HEAD MIXER WITH SWIVEL SPOUT

DELABIE

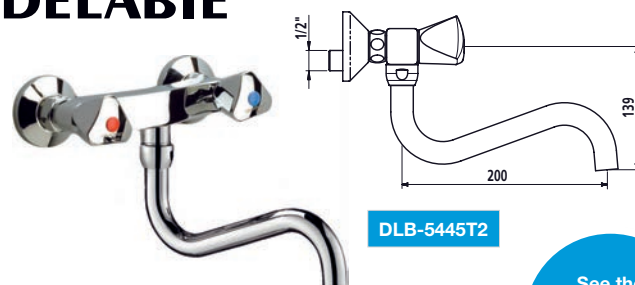

DLB-5445T2

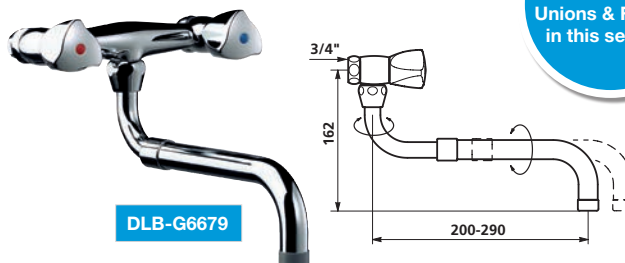


DLB-G6679

See the Accessories: Unions & Fittings in this section.

Model	Description
DLB-5445T2	200mm Swivel Spout
DLB-5445T3	300mm Swivel Spout
DLB-G-6679	200-290mm Telescopic Spout

1/2" DOME HEAD MIXER TAPS WITH SWIVEL SPOUT

GASTROTECHNIX

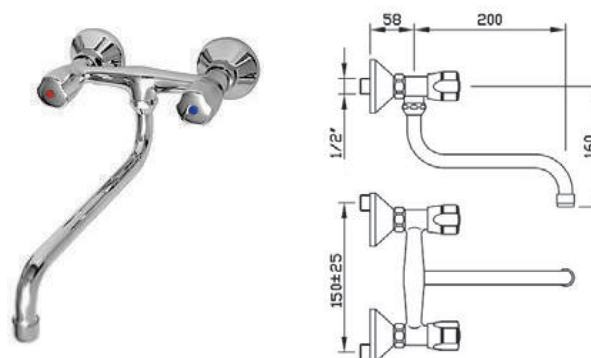

Panel hole: 25mm,
Flow rate: 3 bar / L per M: 32, 4 bar / L per M: 38

Model	Description
GX2460-20	200mm Spout, H160mm
GX2460-25	250mm Spout, H160mm
GX2460-30	300mm Spout, H160mm
GX2460-T20/30	Telescopic Spout 200-300mm, H160mm
GX2460-T28/48	Telescopic Spout 280-480mm, H160mm
GX2460-T35/60	Telescopic Spout 350-600mm, H160mm



WATER



GAS



ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS


SUITABILITY: Light Medium Heavy

PANEL MOUNTED - TWIN MIXER

TWIN HOLE TWIN WATER FEED TWO CONTROLS

3/4" DOME HEAD MIXER WITH SWIVEL SPOUT

GASTROTECHNIX

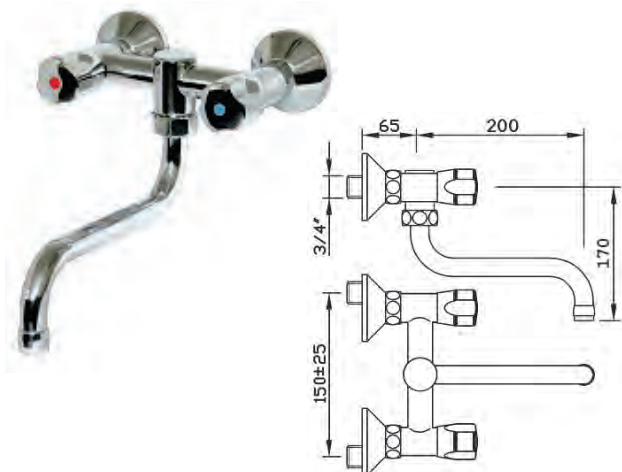


Panel hole: 30mm, Flow rate: 3 bar / L per M: 50

Model	Description
GX2470-20	200mm Spout, H170mm
GX2470-25	250mm Spout, H170mm
GX2470-30	300mm Spout, H170mm



3/4" DOME HEAD MIXER WITH SWIVEL SPOUT

GASTROTECHNIX

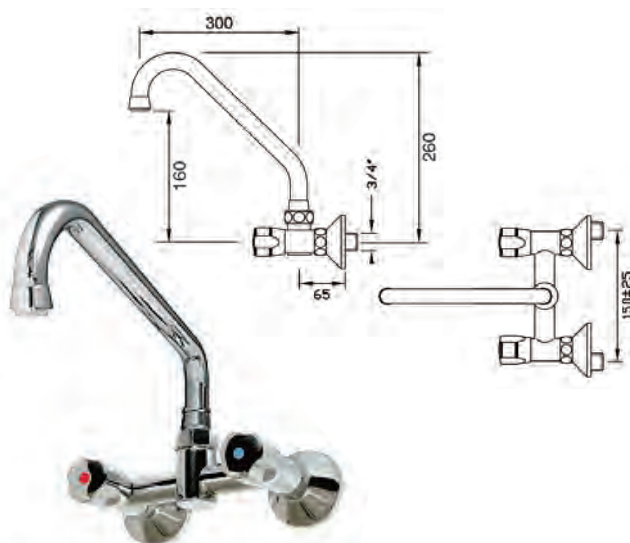


Panel hole: 30mm, Flow rate: 3 bar / L per M: 80

Model	Description
GX2470-H-30	300mm Spout, H260mm



3/4" DOME HEAD MIXER WITH SWIVEL SPOUT

GASTROTECHNIX

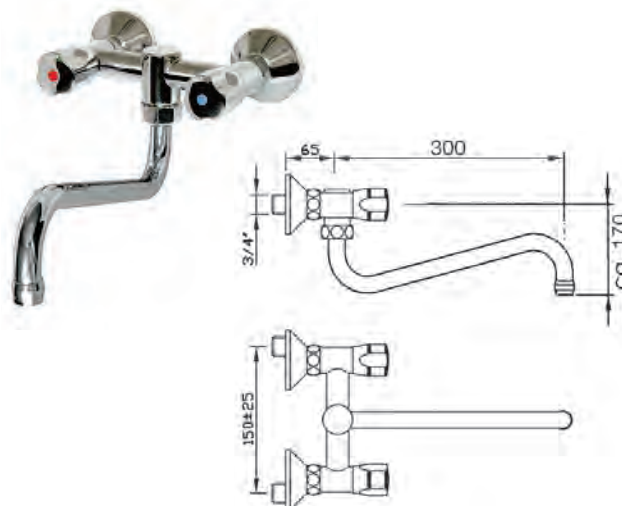


Panel hole: 2x 30mm, Flow rate: 3 bar / L per M: 80

Model	Description
GX2470-ST30	300mm Spout, H190mm
GX2470-ST45	450mm Spout, H190mm



3/4" MIXER WITH LEVER CONTROL AND SWIVEL SPOUT

GASTROTECHNIX

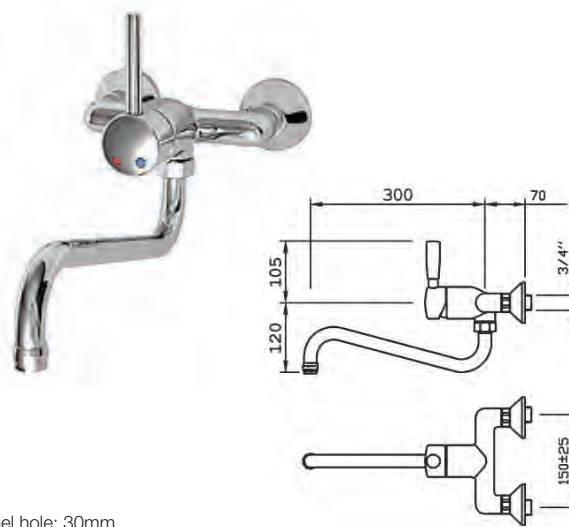

Panel hole: 30mm,
Flow rate: 3 bar / L per M: 50, 4 bar / L per M: 60

Model	Description
GX2462-L-30	300mm, H225mm
GX2462-L-45	450mm, H225mm





WATER



GAS



ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS


SUITABILITY: Light Medium Heavy

PANEL MOUNTED - TWIN MIXER

TWIN HOLE TWIN WATER FEED TWO CONTROLS

3/4" MIXER WITH LEVER CONTROL AND SWIVEL SPOUT

GASTROTECHNIX

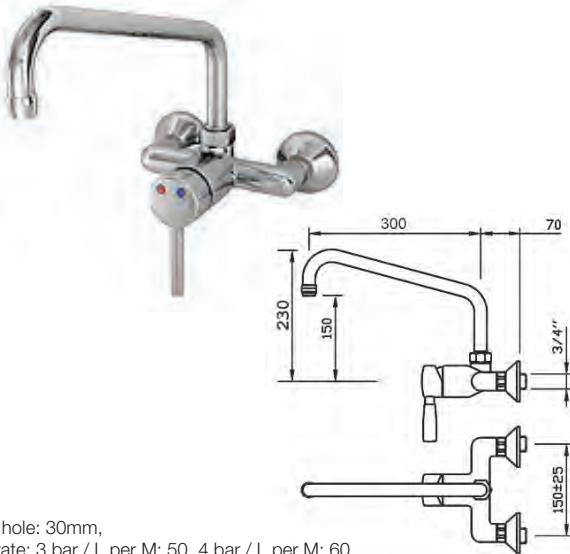


Panel hole: 30mm,
Flow rate: 3 bar / L per M: 50, 4 bar / L per M: 60

Model	Description	
GX2462-H-30	300mm Spout, H230mm	
GX2462-H-45	450mm Spout, H230mm	



3/4" MIXER WITH LEVER CONTROL AND SWIVEL SPOUT

GASTROTECHNIX

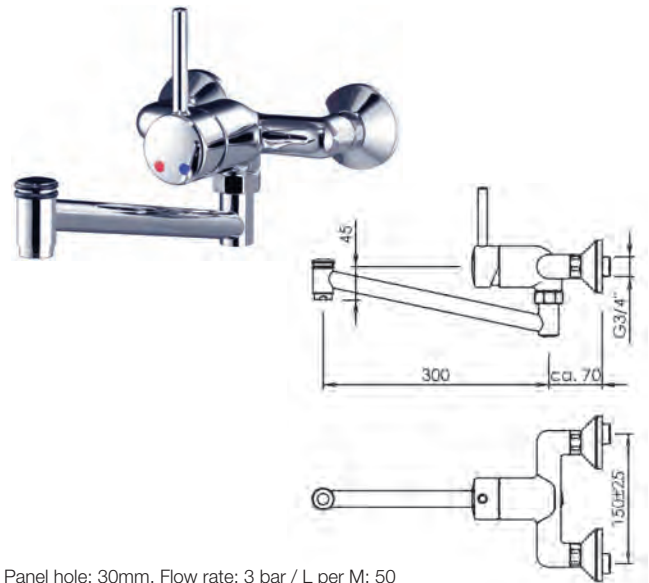

Panel hole: 30mm, Flow rate: 3 bar / L per M: 50

Model	Description	
GX2470-F-30	300mm Spout, H200mm	



OTHER OPTIONS

Fix-A-Tap Gaskets

1/2-inch Fix-A-Tap gaskets prevent taps from swiveling on stainless steel sinks. Made of durable plastic, they are a long-lasting and an essential accessory.



Model	Description	
FXT50	(minimum quantities 5)	

Brass Back Nuts

Model	Description	
10BBN-1/2	1/2-inch Brass back nuts (pack of 10)	

Tap Hole Stopper

Model	Description	
THS	To cover unused tap holes in basins. Fits tap hole sizes up to 35mm	

BASIX

**IMPROVE WATER
SAVING AND
HYGIENE WITH
A HANDS-FREE
WASH STATION**



See pages 63-70 for details



WATER



GAS



ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS


UNIVERSAL TELESCOPIC - SPOUTS

DELABIE

Options for Pre-Rinse Sprays (PRS) and Faucets

Bowl Filling SPOUT (Bib tap)

Model	Description
DLB-966-230	Universal Telescopic Spout, F 3/4-inch, L200-290mm
DLB-966-380	Universal Telescopic Spout, F 3/4-inch, L300-470mm




DECK MOUNTED - SPOUTS

DELABIE


Deck Mounted Fixed Spout

Chrome-plated brass.

Model	Description
DLB-981-148	Reinforced fixing, vandal proof with theft-proof aerator
DLB-981-142	Without reinforced fixing, nor theft-proof aerator




DLB-967-152



Deck Mounted Swan Neck Swivel Spout

Model	Description
DLB-967-152	L150, H120
DLB-967-202	L200, H200

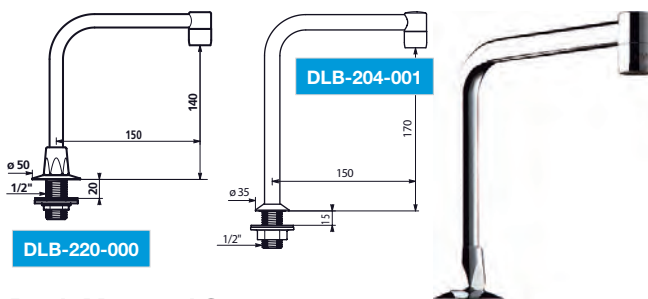


DLB-204-001

DLB-220-000

Deck Mounted Spout

Chrome-plated brass.

Model	Description
DLB-204-001	Fixed Spout, dia. 16 mm, L150, H170 (Special order)
DLB-220-000	Swivel Spout, dia. 16 mm, L150, H140

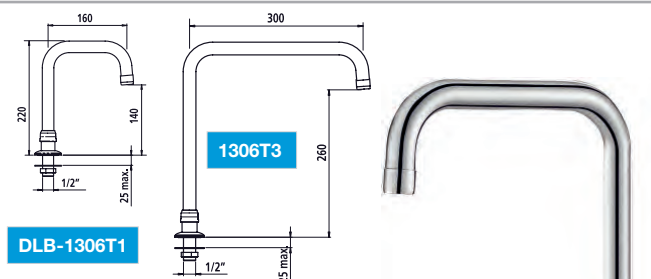

DLB-1306T1

1306T3

Deck Mounted Swivel Spout, Ø 22

M 1/2-inch, chrome-plated brass spout on a base plate. Smooth interior to prevent bacteria build-up. Flow straightener set at 3 lpm at 3 bar (flow rate can be adjusted if pressure < 3 bar)

Model	Description
DLB-1306T1	L160, H140
DLB-1306T2	L210, H260
1306T3	L300, H260




PANEL MOUNTED - SPOUTS

DELABIE



Wall Mounted Spout "Corbin" for panel < 10 mm

Model	Description
DLB-941-922	L120 & scale-proof aerator 6 l/mn



Wall Mounted Spout, Ø 32

Chrome-plated brass.

Model	Description
DLB-947-170	L170 & scale-proof aerator 6 l/mn



WATER



GAS



ENVIRONMENT




PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS

SERVICING TAPS & FITTINGS


DELABIE

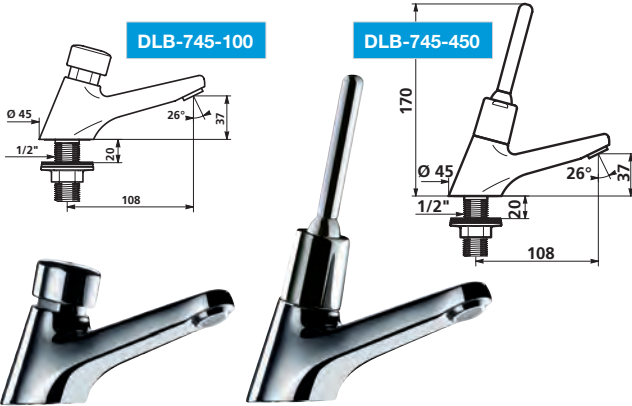

Tempostop Automatic Shut-Off Basin Tap


Model	Description
DLB-745-100	Push-button basin tap
DLB-745-450	Lever-operated basin tap

Tempostop Automatic Shut-Off Wash-Basin Tap

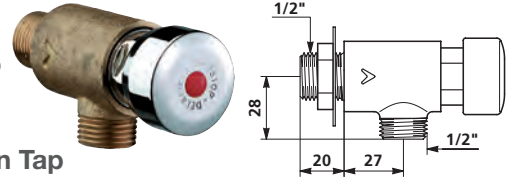

Model	Description
DLB-748-626	Push-button wash-basin tap


Tempostop Automatic Shut-Off Bib Tap

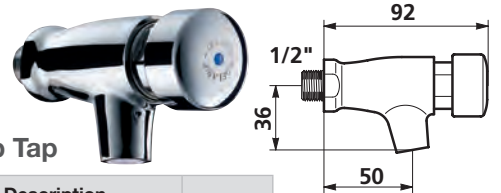

Model	Description
DLB-746-000	Push-button bib tap

Temposoft 2 - Automatic Shut-Off, Time Flow Tap With Soft-Touch Operation

Model	Description
DLB-740-500	Temposoft 2
DLB-742-50015	Temposoft 2 Mixer

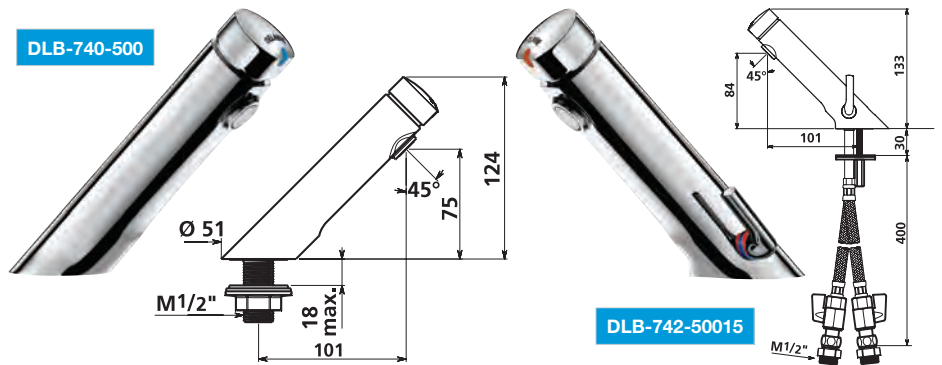


ACCESSORIES: UNIONS & FITTINGS


For Wall-Mounted Pre-Rinse Sprays (PRS) and Wall-Mounted Faucets

DELABIE


All Wall-Mounted units require a through-wall fitting or backplate elbow.

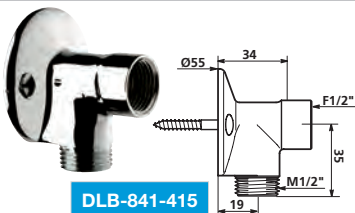


DLB-841-415




DLB-841-327-2P




DLB-857-027-2P



DLB-856-027-2P



DLB-846-415-2P



DLB-846-427-2P

1/2-inch connections for Wall-Mounted units

Model	Description
DLB-841-415	Backplate Elbow for Mixer Tap D-275-200
DLB-846-415-2P	Straight Union through-wall fitting (2 pack)

3/4-inch connections for Wall-Mounted units

Model	Description
DLB-846-427-2P	Straight Union through-wall fitting (2 pack)
DLB-841-327-2P	Backplate Elbow for Mixer Tap G-6679/G-6681 (2 pack)
DLB-856-027-2P	S-Union through-wall fitting (offset) - 12.5mm (2 pack)
DLB-857-027-2P	S-Union through-wall fitting (offset) - 21mm (2 pack)



WATER



GAS




ENVIRONMENT



PEST
CONTROL

KITCHEN FAUCETS/TAPS & SPOUTS

FOUNTAIN WATER FITTINGS

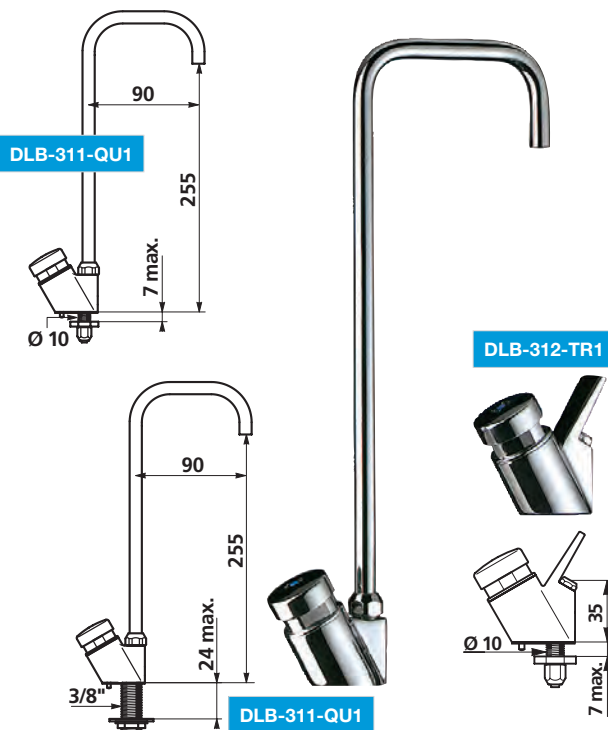

Fountain Pillar Taps & Bubblers

Model	Description	
Swan neck taps		
DLB-311-TR1	Fountain Pillar Tap, Swan neck with inlet for Rilsan tube 4x6 (push-on fitting)	
DLB-311-QU1	Same as 311 TR1, with inlet M 3/8-inch	
Bubblers		
DLB-312-TR1	Bubbler tap with inlet for Rilsan tube 4x6	
DLB-312-QU1	Bubbler with inlet M 3/8-inch	


DELABIE

DLB-747-080


Knee-Operated Valve

Knee-operated, self-closing valve, push disk ø80

Model	Description	
DLB-747-080		
DLB-748-185	Angled	




DLB-748-185




Fountain Bubbler

Model	Description	
DLB-318 Q12	Fountain bubbler inlet 3/8-inch	



Push-Button Tap with instant shut-off For swan neck pillar taps and bubblers


Model	Description	
DLB-319-T61	Connectors for Rilsan tube 4x6	
DLB-319-T81	Connectors for Rilsan tube 6x8	



MAINTENANCE PARTS

Model	Description	
DLB-743-010	Tempostop complete cartridge for models 745-100, 746-000, 748-626	
DLB-743-310	Tempostop complete cartridge for model 745-450	
DLB-743-323	Tempostop complete cartridge for models 737-152, 737-202	
DLB-753-010	Tempostop maintenance bag for models 745-100, 746-000, 748-626	
DLB-753-303	Tempostop maintenance bag for models 737-152, 737-202	
DLB-925-622.2P	Scale proof Aerator (with economy washer) F22 (2 pack)	
DLB-925-624.2P	Scale proof Aerator (with economy washer) M24 (2 pack)	
DLB-366-015.2P	Heads without Handles (Replacement parts for Tap Heads)	
DLB-G	Gamma Chrome Tap Head (sold individually, specify red or blue)	
DLB-816	Replacement retractable spray head (for mixer 2211)	

DLB-743-010



DLB-743-310




DLB-925-622.2P



DLB-925-624.2P

DLB-366-015.2P



If you cannot find a part number and price for what you require, please contact Mechline for assistance



WATER



GAS



ENVIRONMENT



PEST
CONTROL

ELECTRONIC, HANDS FREE TAPS & ACCESSORIES

DELABIE

DECK MOUNTED - ELECTRONIC & BATTERY-OPERATED CONTROLS



DLB-49000615


DLB-44000615

Tempomatic Mix 4 / Tempomatic 4

Electronic mixer or tap for washbasins with 6V Lithium battery, solenoid valve and electronic controls integrated in the body of the tap. Infra-red presence detection.

- Flow straightener set at 3 lpm at 3 bar. Flow rate can be adjusted if the pressure < 3 bar.
- PEX flexibles with integrated filters.
- Chrome-plated brass body with reinforced fixings.
- Anti-blocking safety and temperature limiter.
- Duty flush (for ~45 seconds 24 hours after the last use).

Model	Description
DLB-44000615	Tempomatic 4, battery-operated tap (non mixer) - Mixer Valves can be fitted, if required.
DLB-49000615	Tempomatic Mix 4, battery-operated tap (mixer)
DLB-443-406	Tempomatic 4, wall-mounted battery-operated tap (non mixer) Length 125mm - (special order)
DLB-443-506	Tempomatic 4, wall-mounted battery-operated tap (non mixer) Length 190mm - (special order)

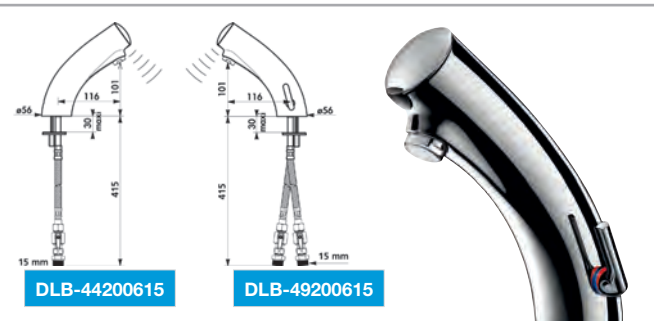

DLB-44200615


DLB-49200615

Tempomatic Mix 3 / Tempomatic 3

Electronic mixer or tap for washbasins with 6V Lithium battery, solenoid valve and electronic controls integrated in the body of the tap. Infra-red presence detection.

- Flow straightener set at 3 lpm at 3 bar. Flow rate can be adjusted if the pressure < 3 bar.
- PEX flexibles with integrated filters.
- Chrome-plated brass body with reinforced fixings.
- Anti-blocking safety and temperature limiter.
- Duty flush (for ~45 seconds 24 hours after the last use).

Model	Description
DLB-44200615	Tempomatic 3, battery-operated tap (non mixer) - Mixer Valves can be fitted, if required.
DLB-49200615	Tempomatic Mix 3, battery-operated tap (mixer)
DLB-443-006	Tempomatic 3, wall-mounted (non mixer) - for thin splashback panels. NB: Other models available for panels 1-22mm thick. Be sure to check which model best suits your needs.

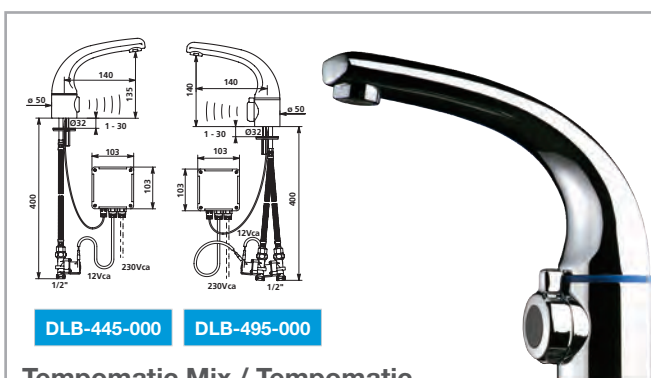

DLB-445-000


DLB-495-000

Tempomatic Mix / Tempomatic

Electronic basin mixer or tap, with removable spout and infrared sensor.

- Flow straightener set at 3 lpm at 3 bar.
- Flexible inlets, filters and solenoid valves M1/2".
- Chrome-plated solid brass body with reinforced fixing and shock proof sensor.
- Separate electronic control box IP65.
- Spout can be removed (for sterilisation in medical areas)
- Duty flush (for ~45 seconds 24 hours after the last use).

Model	Description
DLB-495-000	Tempomatic Mix electronic basin mixer, non-swivel; mains supply power 230/12V w/transformer
DLB-445-000	Non-mixer (single water feed) version of 495 000; mains power 230/12V w/transformer. Mixer valves can be fitted, if required. NB: Battery-powered model also available, 445 006, if preferred.

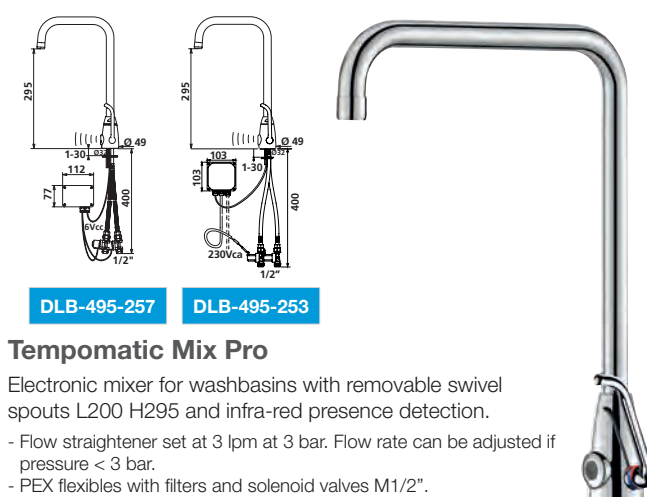

DLB-495-257

DLB-495-253

Tempomatic Mix Pro

Electronic mixer for washbasins with removable swivel spouts L200 H295 and infra-red presence detection.

- Flow straightener set at 3 lpm at 3 bar. Flow rate can be adjusted if pressure < 3 bar.
- PEX flexibles with filters and solenoid valves M1/2".
- Chrome-plated brass body with reinforced fixing.
- Separate IP65 electronic control unit (with integrated transformer 230/12V).
- Removable spout (for sterilisation in the medical sector).
- Automatic duty flush (for ~45 seconds 24 hours after the last use).
- Two shut-off modes available on 230/12V models:
 - > Standard mode: timed flow with automatic shut-off.
 - > ON/OFF mode: voluntary shut-off or after 30 minutes of flow.

Model	Description
DLB-495-253	Tempomatic Mix Pro - electronic basin mixer with swivel spout; mains power supply 230/12V w/transformer
DLB-495-257	Same as 495 253, but battery-operated (6V Lithium batteries)