



EB3FX/HC/PB - Lincat FilterFlow FX Counter-top Combined Water Boiler & Chiller with Push Button Dispense - W 250 mm - 3.0 kW

The FilterFlow Combined Water Boiler and Chiller exists because we don't believe you should have to use two different appliances in July and January - it provides hot and cold water on tap, 24/7.

- ✓ Convenient push button operation, ideal for front of house and self service
- ✓ Filtered chilled and hot water on tap 24 hours a day, space saving and economic - no need for a separate boiler and chiller
- ✓ Narrow 250mm footprint saves valuable counter space without compromising capacity or performance
- ✓ Built-in water filtration system improves water quality and reduces scale build-up. High volume, easy change FilterFlow cartridge
- ✓ Easily operated from a large, colour touchscreen display. Menu navigation is quick and easy with the temperature and timer simple to adjust
- ✓ Enhanced diagnostics identify possible causes. The on screen diagnostic information will enable the engineer to identify the parts needed and repair your water boiler at first visit

Specifications

Summary		Power and Performance	
Brand	Lincat	Total Power kW	3.0
Range	FilterFlow	Temperature Range °C	<11 [Cold]; 70-98 [Hot]
Series	FX Counter-top Boiler	IP Rating	IP23
Power Type	Electric	Hourly Output Litres	12 [Cold]; 28 [Hot]
Unit Type	Counter-top	Hourly Output Cups	60 [Cold]; 140 [Hot]
Available in UK Only	No	Temperature Control	Electronic
UK Warranty	2 Years Parts and Labour Warranty		
Export Warranty	Contact your local dealer		
GTIN	5056105118237		

Key Specifications		Capacity	
Refrigerant Type	R134a	Hot and Cold Water Output	Yes
Outlet	Push Button [Twin Spout]	Rapid Draw Off Litres	5.0 [Hot]
Dispense Lock	No	Rapid Draw Off Cups	25
WRAS Approved	Yes	Capacity Litres	7.0

Weights and Dimensions		Supply Connections	
Unit Height (External) mm	595	Requires Installation	No
Unit Width (External) mm	250	Requires Electrical Supply	Yes
Unit Depth (External) mm	570	UK 3 Pin Plug	Yes
Net Weight Kg	24.8	Requires Hardwiring	No
		Electrical Supply Rating Watts	3,000
		Single Phase Amps	13
		Single Phase Voltage	230
		Water Connection Pressure Bar	2.0-7.0
		Water Connection	3/4"


Shipping

Packed Weight Kg	31.7
Packed Height cm	88
Packed Width cm	65
Packed Depth cm	38

Available Accessories

DP10	DESCALER POWDER
FC04	Filter Cartridge for Lincat FilterFlow Water Boiler
PI36	INLET CONNECTION HOSE EB

Technical Picture

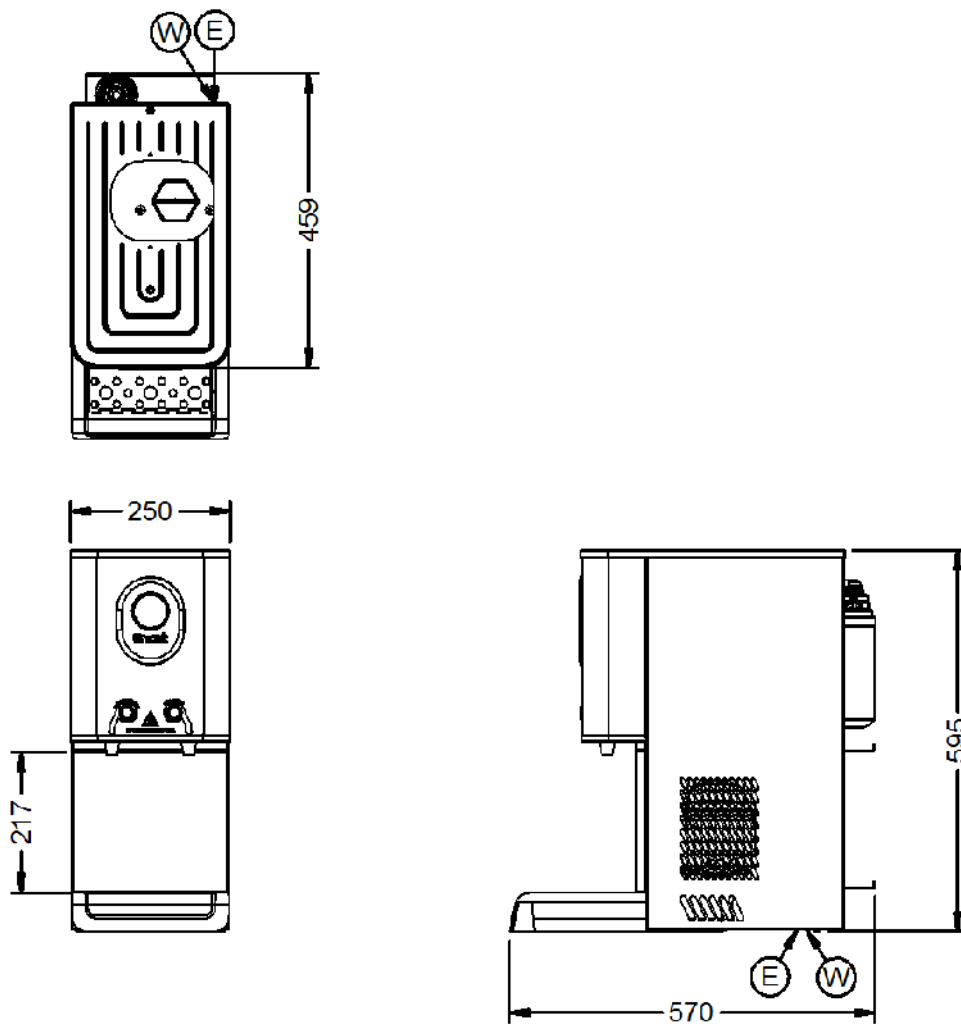



Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm