

Packed Depth cm





F72/210 - IMC VQ7 Counter-top Potato Peeler - 1 Phase - W 500 mm - 0.18 kW Compact and flexible, the VQ7 peeler has a high output and small footprint, making it ideal for smaller kitchens with single-phase power.

- Able to peel 90kg of potatoes per hour, in 7kg batches
- Small footprint and quiet operation, ideal for smaller kitchens
- Compact design for countertops and sink drainers
- Heavy-duty belt and pulley for simple and safe operation
- Self-draining cylinder with smooth profile for easy cleaning
- Long-lasting, rust-proof cast aluminium plate for effective peeling
- Suitable for kitchens with single-phase power supply
- WRAS-compliant Class A air-break and brass spray nozzle to prevent water escape

Range VQ Peeler HP Power Type Electric IP Rating Available in UK Only No Available in UK Onlable in Intertock Capacity Intertocks Capacity Kg per Hour Available in UK Only No Available in UK Onlable Verson No Available in	
Range VO Peeler HP Power Type Electric IP Rating Unit Type Counter-top Available in UK Only No Available in UK Only No But Warranty 2 Years Parts and Labour Warranty Export Warranty Contact your local dealer Drainer; Worktop: Stand [optional]: Pedestal [opti So56105198871 Key Specifications Capacity Capacity Capacity Kg per Hour Timer Yes Drain Location Variable WRAS Approved WRAS Compliant Airbreak Yes Weights and Dimensions Supply Connections Weight (External) mm Unit Width (External) mm So53 Requires Installation Requires Electrical Supply Unit Depth (External) mm So65 Net Weight Kg 29 Requires Hardwiring Motor Rating Watts Single Phase Amps Single Phase Voltage Water Connection Water Connection Shipping	
Power Type Unit Type Counter-top Available in UK Only UK Warranty 2 Years Parts and Labour Warranty Export Warranty Contact your local dealer Drainer: Worktop: Stand [optional]: Pedestal [opti GTIN 5056105198871 Key Specifications Capacity Operator Safety Interlocks Timer Yes Drain Location WRAS Approved Airbreak Weights and Dimensions Unit Height (External) mm Unit Width (External) mm Unit Width (External) mm Net Weight Kg Net Weight Kg 29 Requires Installation Requires Hardwiring Motor Rating Watts Single Phase Amps Single Phase Amps Single Phase Voltage Water Connection Water Connection Water Connection Shipping	0.18
Unit Type Available in UK Only VK Warranty Export Warranty Export Warranty Contact your local dealer Drainer: Worktop: Stand [optional]: Pedestal [opti Fossions Stand Interlocks Capacity Capacity Capacity Kg per Hour WRAS Approved WRAS Compliant WRAS Compliant Weights and Dimensions Unit Height (External) mm Fossions Stand Fossions Unit Width (External) mm Fossions Fossion	0.24
Available in UK Only UK Warranty Export Warranty Export Warranty Drainer: Worktop: Stand [optional]: Pedestal [opti 5056105198871 Key Specifications Capacity Operator Safety Interlocks Operator Safety Timer Yes Drain Location WRAS Approved Airbreak Weights and Dimensions Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Separation of the Weight Kg Separation o	IP55
UK Warranty Export Warranty Contact your local dealer Drainer; Worktop; Stand [optional]: Pedestal [opti So56105198871 Key Specifications Capacity Operator Safety Interlocks Timer Yes Drain Location WRAS Approved WRAS Compliant Airbreak Weights and Dimensions Unit Height (External) mm Unit Width (External) mm Soff Net Weight Kg Soff Soff Soff Soff Soff Soff Soff Sof	
Export Warranty Contact your local dealer Drainer; Worktop; Stand [optional]: Pedestal [opti 5056105198871 Key Specifications Capacity Operator Safety Interlocks Operator Safety Interlocks Operator Safety Interlocks Operator Safety Ves Drain Location WRAS Approved WRAS Compliant Airbreak Weights and Dimensions Supply Connections Weights (External) mm 500 Requires Installation Requires Electrical Supply Unit Depth (External) mm 367 Ut 3 Pin Plug Requires Hardwiring Motor Rating Watts Single Phase Amps Single Phase Amps Single Phase Voltage Water Connection Water Connection Water Connection Shipping	
Mounting GTIN Drainer: Worktop: Stand [optional]: Pedestal [opti 5056105198871 Key Specifications Capacity Operator Safety Interlocks Yes Drain Location WRAS Approved WRAS Compliant Airbreak Weights and Dimensions Unit Height (External) mm 500 Requires Installation Unit Width (External) mm 553 Requires Electrical Supply Unit Depth (External) mm 367 Net Weight Kg 29 Requires Hardwiring Motor Rating Watts Single Phase Amps Single Phase Amps Single Phase Voltage Water Connection Water Connection Water Connection Water Connection	
GTIN 5056105198871 Key Specifications Capacity Operator Safety Interlocks Capacity Kg per Hour Timer Yes Drain Location WRAS Approved WRAS Compliant Airbreak Yes Weights and Dimensions Supply Connections Unit Height (External) mm 500 Requires Installation Unit Width (External) mm 653 Requires Electrical Supply Unit Depth (External) mm 367 UK 3 Pin Plug Net Weight Kg 29 Requires Hardwiring Motor Rating Watts Single Phase Amps Single Phase Voltage Water Connection Shipping	
GTIN 5056105198871 Key Specifications Capacity Operator Safety Interlocks Capacity Kg per Hour Timer Yes Drain Location Variable WRAS Approved WRAS Compliant Airbreak Yes Weights and Dimensions Supply Connections Unit Height (External) mm 500 Requires Installation Unit Width (External) mm 653 Requires Electrical Supply Unit Depth (External) mm 367 UK 3 Pin Plug Net Weight Kg 29 Requires Hardwiring Motor Rating Watts Single Phase Amps Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection Shipping	
Key Specifications Capacity Operator Safety Timer Yes Drain Location WRAS Approved Airbreak Weights and Dimensions Unit Height (External) mm Unit Width (External) mm Sepandary Weight Kg Yes Weight Kg Weight Kg Weight Kg Supply Connections Requires Installation Requires Electrical Supply UK 3 Pin Plug Requires Hardwiring Motor Rating Watts Single Phase Amps Single Phase Amps Single Phase Voltage Water Connection Water Connection Water Connection Shipping	
Operator Safety Timer Yes Drain Location WRAS Approved Airbreak Weights and Dimensions Unit Height (External) mm Unit Width (External) mm Soft Unit Depth (External) mm Soft Net Weight Kg Single Phase Amps Single Phase Voltage Water Connection Shipping Capacity Kg per Hour Capacity Capacit	
Timer Yes Drain Location WRAS Approved WRAS Approved Airbreak Weights and Dimensions Unit Height (External) mm Unit Width (External) mm Unit Weight (External) mm Soo Weight (External) mm Soo Weight (External) mm Soo Requires Installation Requires Electrical Supply UK 3 Pin Plug Net Weight Kg Single Phase Amps Single Phase Amps Single Phase Voltage Water Connection Water Connection Water Connection Water Connection	
Drain Location WRAS Approved WRAS Approved Airbreak Weights and Dimensions Weights (External) mm Unit Width (External) mm Unit Width (External) mm Unit Depth (External) mm 367 UK 3 Pin Plug Requires Electrical Supply UK 3 Pin Plug Requires Hardwiring Motor Rating Watts Single Phase Amps Single Phase Voltage Water Connection Water Connection Water Connection	90
WRAS Approved Airbreak Weights and Dimensions Supply Connections Weights and Dimensions Unit Height (External) mm 500 Requires Installation Requires Electrical Supply Unit Depth (External) mm 367 UK 3 Pin Plug Net Weight Kg 29 Requires Hardwiring Motor Rating Watts Single Phase Amps Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection	
Airbreak Weights and Dimensions Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Sequires Electrical Supply Unit Depth (External) mm Sequires Electrical Supply UK 3 Pin Plug Requires Hardwiring Motor Rating Watts Single Phase Amps Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection	
Weights and Dimensions Unit Height (External) mm Unit Width (External) mm Unit Width (External) mm Unit Depth (External) mm Separate Sepa	
Unit Height (External) mm Unit Width (External) mm 653 Requires Electrical Supply UK 3 Pin Plug Requires Hardwiring Motor Rating Watts Single Phase Amps Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection	
Unit Width (External) mm 10	
Unit Depth (External) mm 367 Net Weight Kg 29 Requires Hardwiring Motor Rating Watts Single Phase Amps Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection	No
Net Weight Kg 29 Requires Hardwiring Motor Rating Watts Single Phase Amps Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection Shipping	Yes
Motor Rating Watts Single Phase Amps Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection	Yes
Single Phase Amps Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection	No
Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection Shipping	180
Water Connection Pressure Bar Drain Connection Water Connection Shipping	1.2
Drain Connection Water Connection Shipping	230
Shipping Water Connection	2.7-3.8[40-55 psi]
Shipping	50.8mm
	12mm
Packed Weight Kg 31.9	
Packed Height cm 52 Packed Width cm 71	





Available Accessories

A29/003 Lid Retaining Strap for SP/VQ Potato Peeler


E72/011 Sink Skip - Stainless Steel - for MF10/MF15L/MF15L/VQ Peeler


S72/023 Waste Ejector for SP/VQ Potato Peeler [2" BSP]


\$72/220 Trolley for VQ Potato Peeler [H 890 mm]

\$72/221 Pedestal for VQ Potato Peeler [H 750/800/850/900/950 mm - adjustable]

Technical Picture





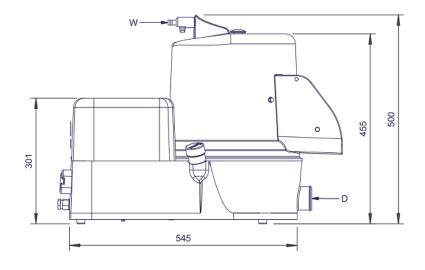







Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

Company No: 2175448

A member company of

Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday - Friday:

8.30am - 5pm