

GAS GENERAL PURPOSE OVEN RANGES



MODELS and ACCESSORIES

G3101 Six burner range - general purpose oven

G3161 Four burner range - general purpose oven

G3107 Solid top range - general purpose oven

- Fully integrated extended flue
- Splashplate and plateshelf (*not for use with extended flue*)
- Oven shelf
- Lift-off fryplate
- Factory fitted, adjustable castors
- Fixed installation kit
- Suiting kit

KEY FEATURES

- Energy efficient, high performance 5.3kW burners
 - *Quick heat up, reduced waiting time*
- Semi-sealed, pressed stainless steel hob
 - *Easy to remove and keep clean*
- Three individual cast iron pan supports on open top units
 - *Long-lasting and robust*
- Chefs' solid top model has removable bullseye
 - *Delivers heat where required, up to 400°C*
- Vitreous enamelled oven chamber
 - *Easy to clean and to keep clean*
- Wide oven temperature range of 120 - 270°C
 - *Ideal to prepare a wide variety of food*
- Piezo ignition to oven
 - *Simple, trouble-free operation*
- 900mm units have twin doors with individual catches
 - *Retains heat within the oven chamber*
- Oven has 5 shelf positions and allows 2 shelf cooking
 - *Versatile, ideal for a wide range of menu items*
- Low profile door handles
 - *Reduces intrusion into work space*
- Laser-etched control icons
 - *Permanent, indelible markings*

INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.


A clearance of 150mm should be observed between appliance and any combustible wall.





GAS GENERAL PURPOSE OVEN RANGES

MODEL DIMENSIONS (in mm)

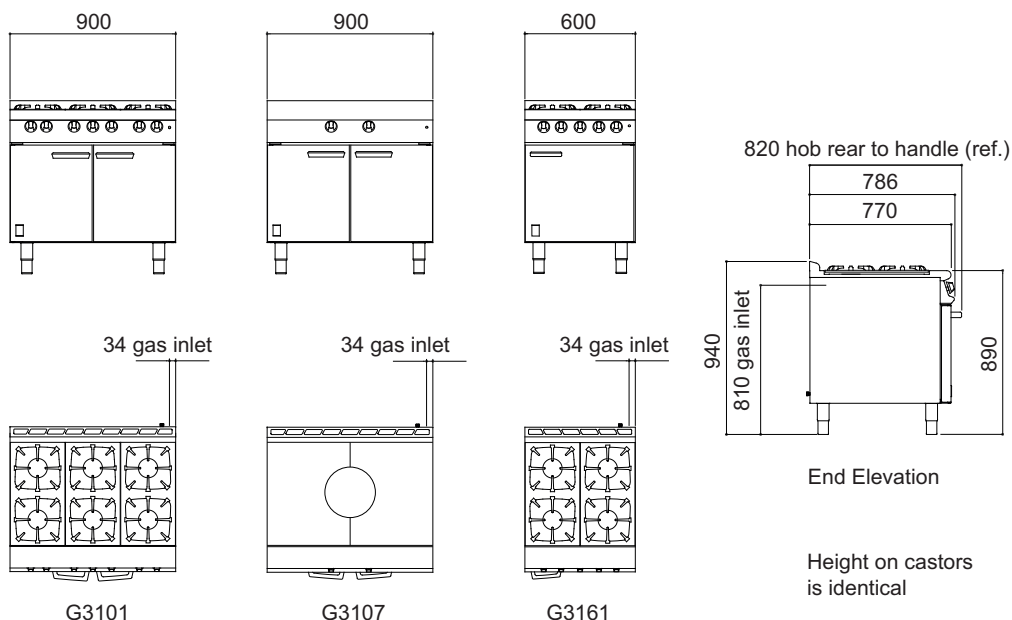

SPECIFICATION DETAILS

	G3101	G3107	G3161
Total rating (natural and propane - kW - Nett)	38.9	17.3	26
Total rating (natural and propane - btu/hr - gross)	146,000	64,900	97,600
Inlet size (natural and propane)	3/4" BSP	3/4" BSP	3/4" BSP
Flow rate - natural (m ³ /hr)	4.10	1.83	2.70
Flow rate - propane (kg/hr)	2.90	1.34	1.90
Inlet pressure (natural and propane - mbar)	20 / 37	20 / 37	20 / 37
Operating pressure (natural and propane - mbar)	15 / 37	15 / 37	15 / 37
Hob burner rating * (natural and propane - kW)	5.3 x 6	10.2	5.3 x 4
Hob burner rating * (natural and propane - btu/hr)	19,900 x 6	38,300	19,900 x 4
Oven burner rating * (natural and propane - kW)	7.1	7.1	4.8
Oven burner rating * (natural and propane - btu/hr)	26,600	26,600	18,000
Oven dimensions (w x d x h - mm)	700 x 535 x 430	700 x 535 x 430	400 x 535 x 430
Oven shelf (w x d - mm)	700 x 535	700 x 535	400 x 535
Gastronorm compatibility	2/1	2/1	1/1
Weight (kg)	114	137	88
Packed weight (kg)	122	145	94