



## OE8306 - Lincat Opus 800 Electric Counter-top Adjustable Salamander Grill - W 600 mm - 4.5 kW

An Opus 800 Salamander Grill with cooking zones which heat up in just eight seconds, and a plate detection and hold function.

- ✓ Cook and hold function. Hold function ensures food is kept warm but does not continue to cook
- ✓ Fast heat up 'Hi-Light' elements - ready to cook in just eight seconds
- ✓ Plate detection mechanism is activated by a plate or gastronorm pan. Once the plate is removed and the plate detection mechanism freed, the elements automatically switch off saving energy
- ✓ GN 1/1 compatible
- ✓ Touchpad control with digital display of time and power settings
- ✓ 20 minute timer

### Specifications

| Summary              |                                   | Power and Performance           |            |
|----------------------|-----------------------------------|---------------------------------|------------|
| Brand                | Lincat                            | Total Power kW                  | 4.5        |
| Range                | Opus 800                          | IP Rating                       | IPX3       |
| Power Type           | Electric                          | Cooking Area (Width x Depth) mm | 525 x 335  |
| Unit Type            | Counter-top                       | Temperature Control             | Mechanical |
| Available in UK Only | No                                |                                 |            |
| UK Warranty          | 2 Years Parts and Labour Warranty |                                 |            |
| Export Warranty      | Contact your local dealer         |                                 |            |
| GTIN                 | 5056105102632                     |                                 |            |

| Key Specifications   |   | Capacity            |           |
|----------------------|---|---------------------|-----------|
| Number of Heat Zones | 3 | Gastronorm Capacity | 1 x GN1/1 |

| Weights and Dimensions    |      | Supply Connections             |                        |
|---------------------------|------|--------------------------------|------------------------|
| Unit Height (External) mm | 544  | Requires Installation          | Yes                    |
| Unit Width (External) mm  | 600  | UK 3 Pin Plug                  | No                     |
| Unit Depth (External) mm  | 562  | Requires Hardwiring            | Yes                    |
| Shelf Dimensions Width mm | 525  | Electrical Supply Rating Watts | 4,500                  |
| Shelf Dimensions Depth mm | 335  | Single Phase Amps              | 19.60                  |
| Net Weight Kg             | 62.5 | Single Phase Voltage           | 230                    |
|                           |      | Three Phase Amps               | L1=6.5; L2=6.5; L3=6.5 |
|                           |      | Three Phase Voltage            | 400                    |


### Shipping

|                  |      |
|------------------|------|
| Packed Weight Kg | 89   |
| Packed Height cm | 88.3 |
| Packed Width cm  | 70.3 |
| Packed Depth cm  | 70.3 |

### Available Accessories

|      |      |
|------|------|
| BR75 | NULL |
|------|------|

## Technical Picture

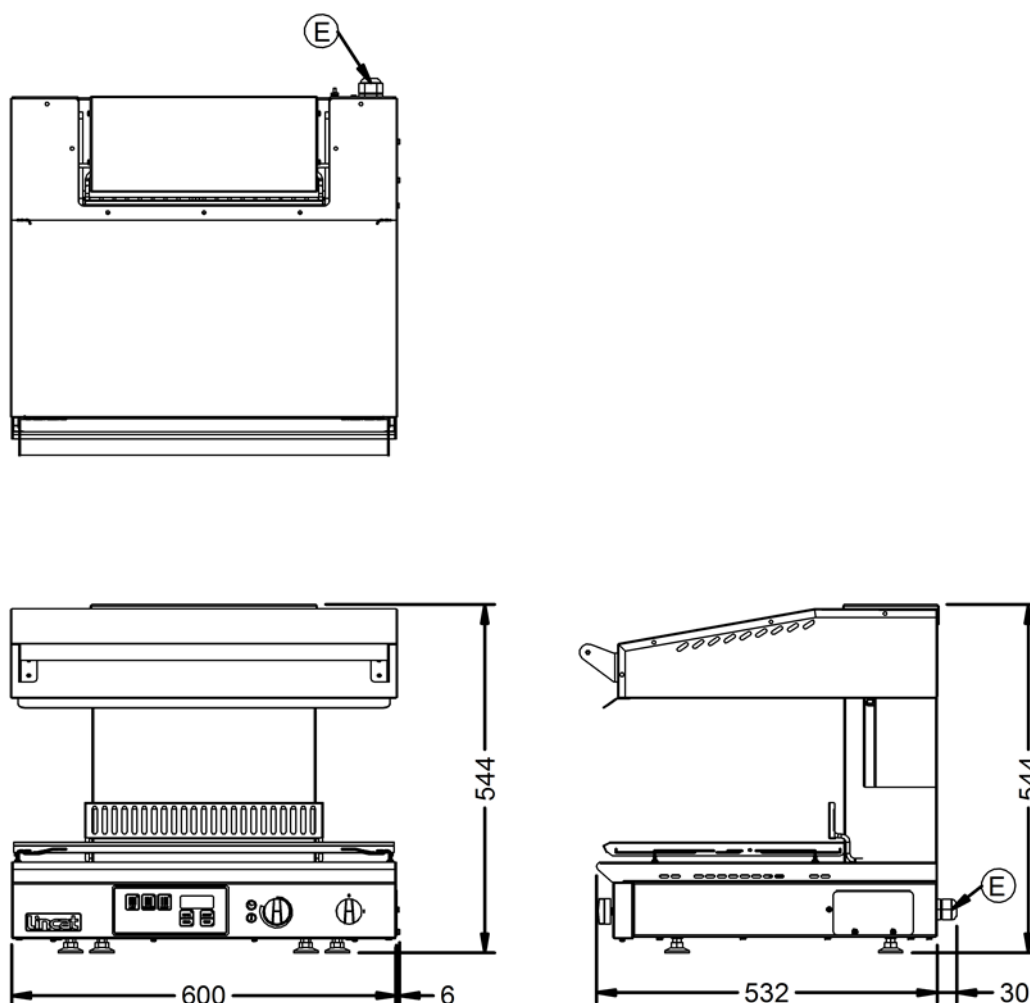

### Lincat Limited

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

Company No: 2175448

A member company of



### Customer Care

Tel: +44 1522 875500

Email: [care@lincat.co.uk](mailto:care@lincat.co.uk)

### Export Customers

Tel: +44 1522 875536

Email: [export@lincat.co.uk](mailto:export@lincat.co.uk)

### Opening Hours

Monday – Friday:

8.30am – 5pm