

MODEL: **AquaTechnix TX-PR-20D-ST-BF1**

AQUATECHNIX

AquaTechnix Pre-Rinse Spray. DOME head operated TX-PR-20D base / STANDARD height / BF1 bowl filler H: 1204mm

Model range: TX-20
Base: TX-PR-20D
Height: Standard
Bowl filler: 150mm bowl filler (BF1)
Pedestal: Single
Mount: Deck mounted
Water feed: Twin Monobloc
Controls: Dome
Connect: 1/2-inch copper tail
Accredita: WRAS

FEATURES & BENEFITS


- Ergonomic in design and functionality.
- Modern, hygienic and practical design comes pre-assembled ready to install.
- All assembled models are factory tested up to 6 bar for quality assurance.
- Complete interchangeability between all bodies, spouts and pre-rinse means that product use can easily be changed on site at a later date.
- Includes PosiStop protected lever and dome heads for long life and reliability for all models and Brass Back Nuts
- Choice of height and bowl filler available

TECHNICAL INFO

- Connections: 1/2-inch copper tail
- Height: 1204mm
- Recommended static water pressure range: 1.5 - 5 bar
- Flow rates for all TX-PR-20 models - tested at 3 bar pressure: SPRAY GUN WATER-SAVING face plate: 4.65 l/m. SPRAY GUN STANDARD face plate: 7.75 l/m. BOWL FILLER WATER-SAVING diffuser: 3.56 l/m. BOWL FILLER STANDARD diffuser: 10.33 l/m. Water-saving diffuser for bowl filler included.

MAINTENANCE & CLEANING

Cleaning chrome: Do not use abrasive, chlorine or acid-based cleaning products. Avoid contact with concentrated bleach. Clean with soapy water using a cloth or sponge.

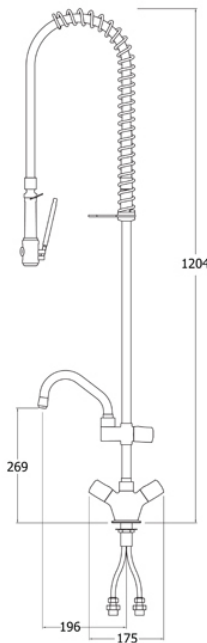

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.



MECHLINE DEVELOPMENTS LIMITED

Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com