

MODEL: **Delabie DLB-1468200**



DELABIE

TEMPOGENOU - Knee operated valve. Angled from the wall inlet

Controls: Knee operated
Accreditation: WRAS

FEATURES & BENEFITS


- Water savings up to 85%.
- Total hygiene: no manual contact.
- Time flow ~7 sec.
- Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.5 to 6 lpm.
- Control lever reinforced by an internal stainless steel rod.
- Fixing plate for wall mounting in solid brass, reinforced by 4 stainless steel screws.
- Cold or mixed water supply.

TECHNICAL INFO

- Connection(s): M1/2-inch.
- Length: 440mm.
- Flow rate: 3 lpm.

MAINTENANCE & CLEANING

Cleaning chrome: Do not use abrasive, chlorine or acid-based cleaning products. Avoid contact with concentrated bleach. Clean with soapy water using a cloth or sponge.

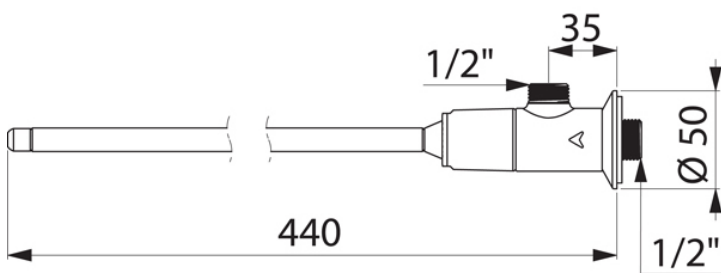

Dimensions are in millimeters. If a Cad file is required please visit www.mechline.com.



MECHLINE DEVELOPMENTS LIMITED
Tel: +44 (0)1908 261511 | Email: info@mechline.com | Web: www.mechline.com